

User Manual

N841 Series



Front Matter

Thank you for purchasing this product. Lorex Corporation is committed to providing our customers with a high quality, reliable security solution.

This manual refers to the following models:

N841A81

N841A82

For the latest online manual, downloads and product updates, and to learn about our complete line of accessory products, please visit our website at:

lorex.com



WARNING

RISK OF ELECTRIC SHOCK
DO NOT OPEN



WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER. NO USER SERVICEABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.

CAUTION: TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF THE PLUG TO THE WIDE SLOT AND FULLY INSERT.



1 Important Safeguards

In addition to the careful attention devoted to quality standards in the manufacturing process of your product, safety is a major factor in the design of every instrument. However, safety is your responsibility too. This sheet lists important information that will help to ensure your enjoyment and proper use of the product and accessory equipment. Please read them carefully before operating and using your product.

1.1 General Precautions

1. All warnings and instructions in this manual should be followed.
2. Remove the plug from the outlet before cleaning. Do not use liquid aerosol detergents. Use a water-dampened cloth for cleaning.
3. Do not use this product in humid or wet places.
4. Keep enough space around the product for ventilation. Slots and openings in the storage cabinet should not be blocked.
5. It is highly recommended to connect the product to a surge protector to protect from damage caused by electrical surges. It is also recommended to connect the product to an uninterruptible power supply (UPS), which has an internal battery that will keep the product running in the event of a power outage.




CAUTION

Maintain electrical safety. Power line operated equipment or accessories connected to this product should bear the UL listing mark or CSA certification mark on the accessory itself and should not be modified so as to defeat the safety features. This will help avoid any potential hazard from electrical shock or fire. If in doubt, contact qualified service personnel.

1.2 Installation

1. **Read and Follow Instructions:** All the safety and operating instructions should be read before the product is operated. Follow all operating instructions.
2. **Retain Instructions:** The safety and operating instructions should be retained for future reference.
3. **Heed Warnings:** Comply with all warnings on the product and in the operating instructions.
4. **Polarization:** Do not defeat the safety purpose of the polarized or grounding-type plug.
A polarized plug has two blades with one wider than the other.

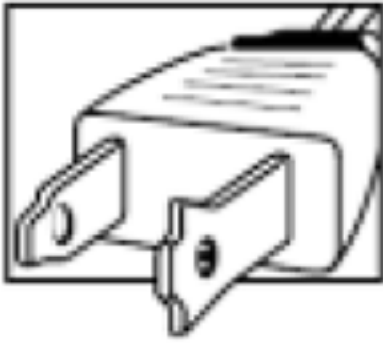

A grounding type plug has two blades and a third grounding prong.



The wide blade or the third prong are provided for your safety.

If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

5. **Power Sources:** This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your location, consult your video dealer or local power company. For products intended to operate from battery power, or other sources, refer to the operating instructions.

6. **Overloading:** Do not overload wall outlets or extension cords as this can result in the risk of fire or electric shock. Overloaded AC outlets, extension cords, frayed power cords, damaged or cracked wire insulation, and broken plugs are dangerous. They may result in a shock or fire hazard. Periodically examine the cord, and if its appearance indicates damage or deteriorated insulation, have it replaced by your service technician.

7. **Power-Cord Protection:** Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them. Pay particular attention to cords at plugs, convenience receptacles, and the point where they exit from the product.

8. **Surge Protectors:** It is highly recommended that the product be connected to a surge protector. Doing so will protect the product from damage caused by power surges. Surge protectors should bear the UL listing mark or CSA certification mark.

9. **Uninterruptible Power Supplies (UPS):** Because this product is designed for continuous, 24/7 operation, it is recommended that you connect the product to an uninterruptible power supply. An uninterruptible power supply has an internal battery that will keep the product running in the event of a power outage. Uninterruptible power supplies should bear the UL listing mark or CSA certification mark.

10. **Ventilation:** Slots and openings in the case are provided for ventilation to ensure reliable operation of the product and to protect it from overheating. These openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This

product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided and the product manufacturer's instructions have been followed.

11. **Attachments:** Do not use attachments unless recommended by the product manufacturer as they may cause a hazard.
12. **Water and Moisture:** Do not use this product near water — for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement, near a swimming pool and the like.
13. **Heat:** The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.
14. **Accessories:** Do not place this product on an unstable cart, stand, tripod, or table. The product may fall, causing serious damage to the product. Use this product only with a cart, stand, tripod, bracket, or table recommended by the manufacturer or sold with the product. Any mounting of the product should follow the manufacturer's instructions and use a mounting accessory recommended by the manufacturer.
15. **Camera Extension Cables:** Check the rating of your extension cable(s) to verify compliance with your local authority regulations prior to installation.
16. **Mounting:** The cameras provided with this system should be mounted only as instructed in this guide or the instructions that came with your cameras, using the provided mounting brackets.
17. **Camera Installation:** Cameras are not intended for submersion in water. Not all cameras can be installed outdoors. Check your camera environmental rating to confirm if they can be installed outdoors. When installing cameras outdoors, installation in a sheltered area is required.

1.3 Service

1. **Servicing:** Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
2. **Conditions Requiring Service:** Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - When the power supply cord or plug is damaged.
 - If liquid has been spilled or objects have fallen into the product.
 - If the product has been exposed to rain or water.
 - If the product has been dropped or the cabinet has been damaged
 - If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation.
 - When the product exhibits a distinct change in performance. This indicates a need for service.
3. **Replacement Parts:** When replacement parts are required, have the service technician verify that the replacements used have the same safety characteristics as the original parts. Use of replacements specified by the product manufacturer can prevent fire, electric shock, or other hazards.
4. **Safety Check:** Upon completion of any service or repairs to this product, ask the service technician to perform safety checks recommended by the manufacturer to determine that the product is in safe operating condition.

1.4 Use


1. **Cleaning:** Unplug the product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.

2. **Product and Cart Combination:** When product is installed on a cart, product and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the product and cart combination to overturn.
3. **Object and Liquid Entry:** Never push objects of any kind into this product through openings as they may touch dangerous voltage points or “short-out” parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.
4. **Lightning:** For added protection of this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the product due to lightning and power line surges.




2 Package Contents


Your security recorder package includes the following components:

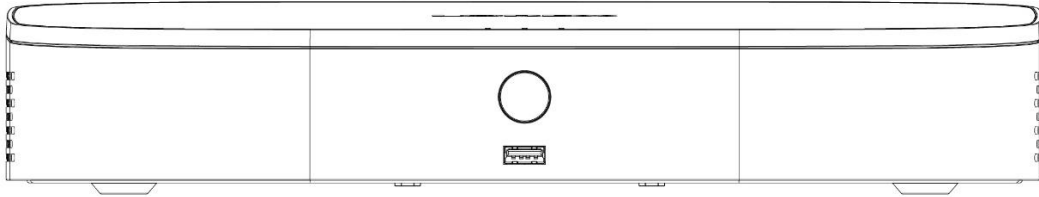


4K Ultra HD Security NVR




Power Adapter



Ethernet Cable



USB Mouse

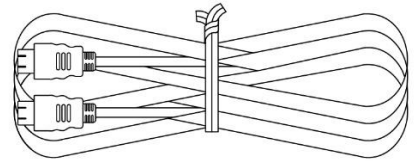

HDMI Cable




NOTE




Hard drive size, number of channels, and camera configuration may vary by model. Please refer to your package for specific details. Check your package to confirm that you have received the complete system, including all components shown above.

3 Recorder Overview

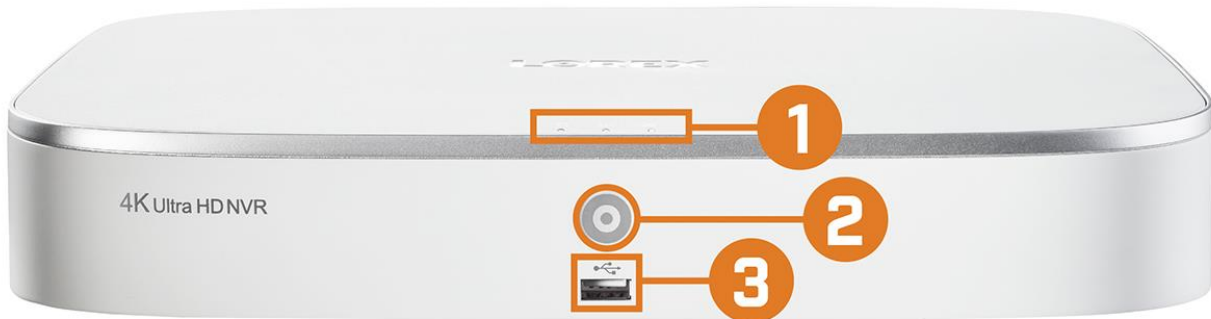3.1 Front Panel



1. LED Indicators:


-  **HDD:** Glows to indicate hard drive is in normal state. Turns off when there is a hard drive error.
-  **POWER:** Glows to indicate the system is on.
-  **NETWORK:** Glows when network is in normal state. Turns off when there is a network error.

2. Info / Panic Button:

- From live view, press once to open the System Information screen.
- Press and hold for 3 seconds to activate the warning lights and sirens on all connected deterrence cameras.

3. **USB Port:** Connect a USB mouse (included) to control the system, or a USB flash drive (not included) for data backup or manual firmware updates.

3.2 Back Panel

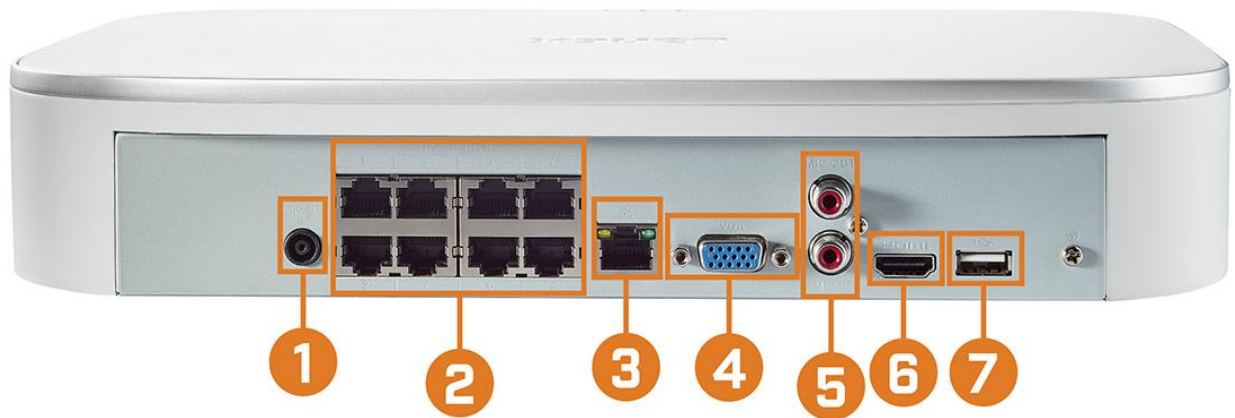

1. **DC 12V:** Connect the included power adapter.
2. **PoE Video Inputs:** Connect Lorex IP cameras to the system. For a full list of compatible cameras, visit lorex.com/compatibility.
3. **LAN:** Connect an RJ45 Ethernet cable for local and remote connectivity.
4. **VGA:** Connect a VGA monitor (not included) to view the system interface.
5. **Audio IN/Audio OUT:** Connect an external microphone for single-channel audio recording, or an external speaker for system audio. For details on connecting external audio devices, see [20 Connecting Audio Devices](#).
6. **HDMI:** Connect to an HDMI monitor or TV (not included) to view the system interface.
7. **USB Port:** Connect a USB mouse (included) to control the system, or a USB flash drive (not included) for data backup or manual firmware updates.

4 Basic System Setup

4.1 STEP 1: Connect cameras



NOTE

This step is for verification of the camera image only. It is recommended to connect cameras to a nearby power adapter for this step. The Lorex Setup Wizard that runs at startup will assist you in naming and organizing your cameras, so it is also recommended to leave cameras connected until the wizard asks you to install cameras in their permanent mounting location.

Option 1: Direct Connection to NVR

Test your cameras prior to selecting a permanent mounting location by temporarily connecting the cameras and cables to your recorder. Connect the cameras to the recorder using the RJ45 Ethernet extension cables provided with your cameras.



Option 2: Connect Cameras to Local Network

You can also connect your IP cameras to your local network for flexible installations. For details, see [4.8 Connecting Cameras to the Local Area Network \(LAN\)](#).



NOTE

Before selecting a permanent mounting location for your cameras, see [5 Camera Installation](#) for important notes and installation tips.

4.2 STEP 2: Connect router

Connect the recorder to your router using the included Ethernet cable.



NOTE

To receive automatic firmware updates and enable remote viewing with mobile apps, a high speed Internet connection is required (minimum upload speed of 5Mbps required for 4K viewing; 3.5Mbps for lower resolutions). All other system features can be used without an Internet connection.

4.3 STEP 3: Connect mouse

Connect the included mouse to a USB port on the recorder.



4.4 STEP 4: Connect monitor

Connect the recorder to a monitor using the included HDMI cable (supports up to 4K resolution).



OR

Connect the recorder to a monitor using a VGA cable (not included - supports up to 1080p resolution).



CAUTION

If you need to switch monitors, make sure you set the recorder to an output resolution supported by the new monitor before switching. See [16.4.16 Setting the Monitor Resolution \(Display\)](#) for details.

4.5 STEP 5: Connect power

Use the included power adapter to connect the recorder to a nearby outlet.

4.6 STEP 6: Upgrade Firmware to Latest Version (If Available)

If a firmware upgrade is available, you will be asked to install it once the system starts up. It is required to upgrade your system firmware and client software or mobile apps to the latest version to enable remote connection to the system.

NOTE

You must connect your recorder to a router with Internet access in order to get automatic firmware upgrades.

If a firmware upgrade is available:

1. After startup, a notification will appear asking you to upgrade the firmware. Click **OK** to upgrade.
2. Enter the system user name (default: **admin**) and your secure password, then click **OK**. Wait for the firmware update to complete. The system will restart once the firmware has been upgraded.

CAUTION

DO NOT POWER OFF THE SYSTEM OR DISCONNECT THE POWER CABLE DURING FIRMWARE INSTALLATION.

4.7 Quick Access to System Information

Perform one of the following actions to bring up the system information window. This window contains vital system information including the model number, serial number, and device ID.

NOTE

The QR code shown on this screen can be scanned during mobile setup to enter the system's device ID.

To quickly open a window that displays important system information:

- From the Live View display, right-click to open the Quick Menu, then click **Info**.

OR

- Press the front panel button on the recorder.

NOTE

Do not press and hold the button. The front panel button doubles as a panic button that activates warning lights and sirens for deterrence cameras if held for 3 seconds.

4.8 Connecting Cameras to the Local Area Network (LAN)

For flexibility, you may also connect IP cameras to the same Local Area Network (LAN) as the NVR. This is accomplished by connecting the cameras to the same router as the NVR.

For these installations, an external PoE switch (sold separately) or power adapter (sold separately) must be used to provide power to each IP camera. You also must add the cameras on the NVR before they will show a picture on the monitor or be recorded by the NVR.

Follow the steps below to connect the cameras to the NVR over the LAN.

NOTE

Compatible with Lorex HD IP cameras. For a list of compatible cameras, please visit lorex.com/compatibility .
--

Step 1 of 2 — Option A: Connecting cameras to your local network using a PoE switch:

1. Connect an Ethernet cable from the LAN port on an external PoE switch (sold separately on lorex.com) to your router using a CAT5e or higher Ethernet cable. Connect the power cable to the PoE switch and to a power outlet or surge protector.

NOTE

Terminology may vary depending on the model of PoE switch you have.

2. Connect the IP cameras to the PoE switch using the Ethernet extension cables. The PoE switch will provide power and video transmission the same way as your NVR.

Step 1 of 2 — Option B: Connecting cameras to your local network using power adapters:

1. Connect each camera to a compatible power adapter (check your camera documentation at lorex.com for compatible power adapters for your cameras).
2. Connect the camera to your router using a CAT5e or higher Ethernet cable.

Step 2 of 2: Add the cameras to your NVR:

1. Right-click and select **Device Search**.
2. Click **Device Search**. The system searches the network for compatible cameras.
3. Check the camera(s) you would like to add.
4. Click **Add**. The **Status** indicator turns green to show the camera is successfully connected.

NOTE

You can also add a camera to a specific channel by hovering the mouse over an empty channel in split-screen view and clicking . . Double-click the camera you would like to add, then right-click to exit.
--



5 Camera Installation

The following chapter provides general setup instruction and installation tips for security cameras. Ensure that you review [5.2 Ensuring Accurate Person & Vehicle Detection](#) for channels you are planning to use Person & Vehicle detection on.



NOTE

Cameras differ in terms of mounting instructions. Please see your camera's documentation at lorex.com for specific installation instructions.

5.1 Installation Tips

General camera installation tips that apply to all camera models. Please review before selecting a permanent mounting location for your cameras.

- Test the cameras before permanent installation. Plan where you will route the wiring for the camera and where you will aim the camera.
- Point the camera where there is the least amount of obstructions (e.g., tree branches).
- Mount the camera where the lens is away from direct and intense sunlight.
- Plan your cable wiring so that it does not interfere with power lines or telephone lines.
- Secure cabling so that it is not exposed or easily cut.
- Mount the camera in an area that is visible, but out of reach.
- Avoid pointing the camera at a glass window to see outside. This may result in a bright white ring in the night vision image, as the light from the night vision LEDs may reflect off the glass.
- Adjust the camera angle so that it covers an area with high traffic.
- In "high-risk" locations, have multiple cameras point in the same area. This provides camera redundancy if a vandal attempts to damage one of your cameras.
- For outdoor rated cameras, installation in a sheltered location is recommended to ensure the camera lens remains clear of rainwater and other precipitation.


5.2 Ensuring Accurate Person & Vehicle Detection

The following are important camera installation notes to ensure accurate Person & Vehicle detection. For full camera mounting instructions, see your camera's documentation at [lorex.com](https://www.lorex.com).

- Choose a location where objects of interest will be no further than 50ft (~15m) from the camera.
- Angle the camera so that objects of interest appear in the bottom 2/3 of the camera image.



Angle the camera between 30~60° down from the level position.

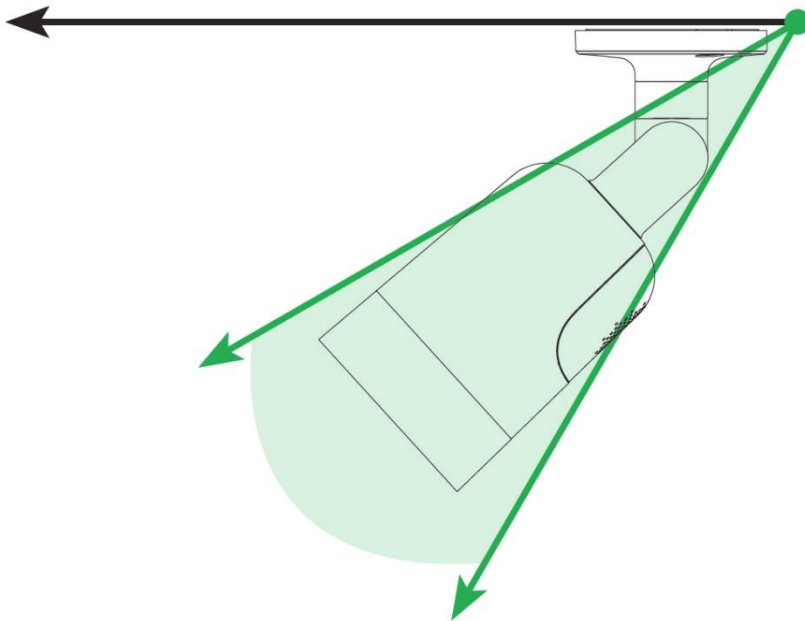

- Install the camera between 8-16ft (2.5-5m) off of the ground.

NOTE

Accuracy of Person & Vehicle detection will be influenced by multiple factors, such as the object's distance from the camera, the size of the object, and the height and angle of the camera. Night vision will also impact the accuracy of detection.

5.3 Installing Cameras

1. Mount the cameras to the desired mounting surface according to the instructions that came with the cameras (visit lorex.com for the most up-to-date documentation). Choose a firm mounting surface that can support the full weight of the camera.

NOTE
If you wish to mount cameras to drywall, it is recommended to use the included drywall anchors.

2. Adjust the camera stand to ensure that the camera has a satisfactory view of the area you would like to monitor. Stand configuration depends on the mounting surface you have chosen (see below for suggested stand configurations).

Wall Mount	Ceiling Mount
NOTE	
Counter / table top mounting is not recommended if you are planning to utilize Person & Vehicle detection due to limited accuracy. Please refer to 5.2 Ensuring Accurate Person & Vehicle Detection for recommended camera angling to ensure accurate detection.	

5.4 Connecting Camera Extension Cables

It is recommended to connect your cameras directly to the NVR. This is because the NVR features Power over Ethernet (PoE) ports that are used to transmit video and audio, as well as provide power to the camera without the need for a power adapter.


You can also connect cameras to a network switch or router (see [4.8 Connecting Cameras to the Local Area Network \(LAN\)](#) for details). If your switch does not support PoE, or you are connecting cameras to a router, you will require a power adapter for each camera (sold separately). Refer to your camera's documentation at lorex.com for the correct power adapter to use.

1. Connect the camera to the included Ethernet extension cable.
2. Connect the other end of the Ethernet extension cable to one of the PoE ports on the rear panel of the NVR.



6 Using the Mouse

The mouse is the primary control device for the system. Connect the included mouse to the USB port on the front or rear panel.

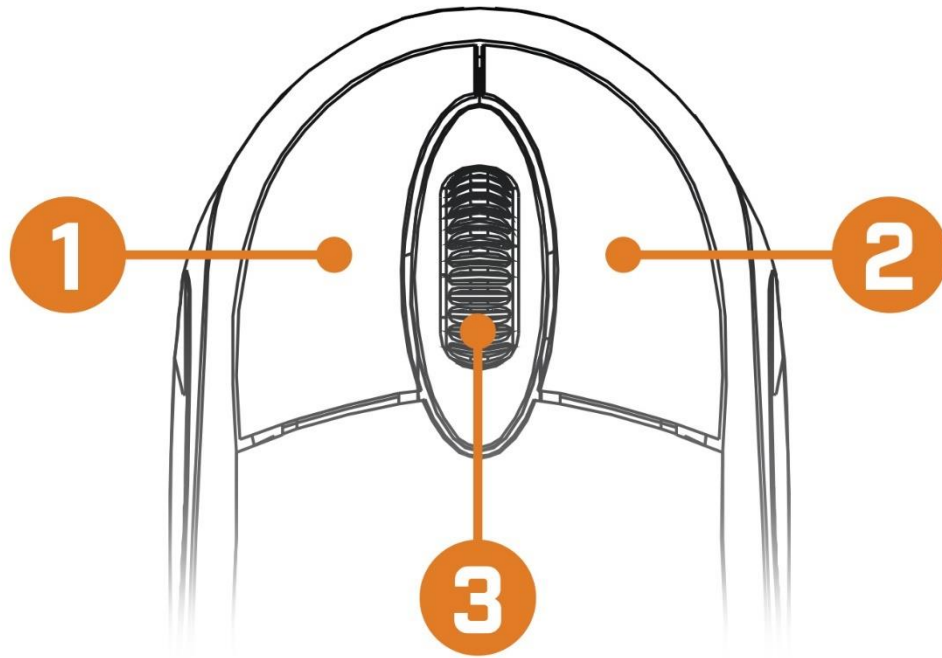

1. **Left-button:**

- In live view, while in a split-screen display mode, click an individual channel to view it in full-screen. Click again to return to the split-screen display mode.
- While navigating menus, click to open a menu option.

2. **Right-button:**

- During live view, right-click anywhere on the screen to open the Quick Menu.
- Within system menus, right-click to exit menus.

3. **Scroll wheel:** In live view, use the scroll wheel to zoom in/out.

7 Setting the Date & Time



CAUTION

It is highly recommended to set the date and time when first setting up your system.

Inaccurate time stamps may render your footage unusable for court evidence.




NOTE

This chapter covers setting system date and time only. See the references below for full instructions on the other submenus shown below:

- **General:** See [16.4.15 Configuring General System Settings](#).
- **Holiday:** See [16.4.14 Configuring Holidays](#).

To set the date and time:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **GENERAL** tab on the side panel, then click **Date & Time** on the top panel.



GENERAL

General Date&Time Holiday

DISPLAY

ACCOUNT

Config Backup

DEFAULT

UPGRADE

3

4

5

6

Date Format MM DD YYYY Time Format 12-HOUR

Date Separator -

System Time 05-07-2019 10:18:26 AM to GMT-05:00 OK

☒ DST DST Type ☒ Week ☐ Date

Start Time Mar 2nd Sun 02 : 00 AM

End Time Nov 1st Sun 02 : 00 AM

☒ NTP

Server pool.ntp.org Manual Update

Port 123 (1~65535)

Interval 24 Hour

Default OK Cancel Apply

SYSTEM

3. Under **System Time**, enter the current time and select your time zone. Then, click **OK**.
4. Check the **DST** check box to enable auto Daylight Savings Time updates.



NOTE

- You can adjust the **Start Time** and **End Time** for Daylight Savings Time if the default settings do not match your region.
- Under **DST Type**, select **Week** to set the start and end time based on a day and week (e.g. 2nd Sunday in March), or select **Date** to set the start and end time to a specific date.

5. (Optional) Check the **NTP** check box to sync your system with an Internet time server. Click **Manual Update** to instantly update the time.



NOTE

- Your system must have a constant connection to the Internet to use NTP.
- (Advanced) You can enter a custom NTP server under **Server** and **Port**, and you can select how often the system will sync the time using **Interval**.

6. Click **Apply** to save changes.



8 Using the On-Screen Display

Use the system's on-screen display to navigate menus and configure options and settings.



NOTE

To access the on-screen display, you must connect the included mouse and a monitor (not included) to the recorder. See [4 Basic System Setup](#) for full instructions.

8.1 Navigation Bar

The **Navigation Bar** along the bottom of the recorder's Live View display allows you to access the Main Menu and control basic functions of the recorder.

To show the Navigation Bar:

- Hover the mouse pointer near the bottom of the Live View screen.



1. **Main Menu:** See [16 Using the Main Menu](#) for full instructions on using the Main Menu.
2. **Collapse Navigation Bar**
3. **Viewing Modes:** Select how many channels are shown on screen during live viewing.
4. **Sequence Mode:** Start or stop Sequence Mode. In Sequence Mode, the system display will automatically cycle through connected channels every few seconds.
5. **Pan/Tilt/Zoom:** Control and configure settings for Pan-Tilt-Zoom (PTZ) cameras. For full instructions on connecting and using PTZ cameras, see [19 Pan/Tilt/Zoom \(PTZ\) Cameras](#).
6. **Camera:** Click to open camera image settings. For full details, see [8.5 Camera Image Settings](#).
7. **Playback:** Opens the Playback Menu. This allows you to search for video recordings saved on the recorder's hard drive. For details on using the Playback menu, see [10 Playback](#).
8. **Alarm Status:** View alarms in progress. See [16.3.4 Event Information](#) for details.
9. **Channel Info:** Click to access status information about connected cameras.
10. **Remote Device Search:** Manage IP cameras over the network.
11. **Network:** View and configure network options, including setting a dynamic or static IP address. For full instructions on configuring network options, see [16.4.1 Selecting DHCP or Static IP Address \(TCP/IP\)](#).
12. **Hard Drive Manager:** Configure hard drive read/write options (see [16.4.13 Configuring Hard Drive Type](#) for details) or format drives (see [16.4.12 Formatting the Hard Drive](#) for details).
13. **USB Manager:** Click to access options for connected USB thumb drives (not included). You can backup video, logs, or system configurations and install firmware upgrades.

14. **System Upgrade:** Check for firmware upgrades. The system must be connected to the Internet to check for or receive updates.
15. **Warning Light & Siren — Deterrence Cameras Only:** Click to activate warning lights and sirens for all connected deterrence cameras. Click again to deactivate.

8.2 Quick Menu

The **Quick Menu** gives you quick access to functions which can also be accessed using the Navigation Bar.

To open the Quick Menu:

- Right-click anywhere on the Live View screen.



1. **Viewing Modes:** Select how many channels are shown on screen during live viewing.
2. **Pan/Tilt/Zoom:** Control and configure settings for Pan-Tilt-Zoom (PTZ) cameras. For full instructions on connecting and using PTZ cameras, see [19 Pan/Tilt/Zoom \(PTZ\) Cameras](#).
3. **AutoFocus:** Access zoom/focus controls for auto-focus cameras (not included).
4. **Camera Setting:** Configure image settings for cameras. For full details, see [8.5 Camera Image Settings](#).
5. **Info:** Displays system information, such as model number, device ID, IP address, etc.

6. **Sequence:** Start or stop Sequence Mode. In Sequence Mode, the system display will automatically cycle through connected channels every few seconds.
7. **Disable Beep:** Temporarily disable the current audible warning.

NOTE
Audible warnings can be given for a wide range of events, such as hard drive issues, network connectivity, motion detection events and more. Disabling the current audible alarm using the Quick Menu will silence the recorder only for a short time, then audible warnings will continue.

8. **Playback:** Opens the Playback Menu. This allows you to search for video recordings saved on the recorder's hard drive. For details on using the Playback menu, see [10 Playback](#).
9. **Smart Search:** Search for detection events of people and vehicles only. For full instructions, see [14.2 Searching for Person & Vehicle Detection Events \(Smart Search\)](#)
10. **Manual:** Select manual recording and snapshot options. For details, see [9.4 Setting up Scheduled or Manual Recording](#).
11. **Device Search:** Open the Device Search menu to manage IP cameras over the local network.
12. **Main Menu:** See [16 Using the Main Menu](#) for full instructions on using the Main Menu.

8.3 Camera Toolbar

The **Camera Toolbar** lets you perform quick functions for a specific channel on the recorder.

To use the Camera Toolbar:

- Hover the mouse near the top of a channel with a connected camera.
1. **Instant Playback:** Plays back recent video from the selected channel. By default, instant playback is set to play the last 5 minutes of recorded video. See [16.4.15 Configuring General System Settings](#) to set a custom playback length.
 2. **Digital Zoom:** Click to enable digital zoom. Click-and-drag over the camera image to zoom in on the selected area. Right-click to return to the full camera image. You can then repeat to zoom in on a different area, or click the icon again to disable zoom.
 3. **Real-time Backup:** Click to start recording the current channel manually. Click again to stop recording and save the video file to a USB flash drive (not included).
 4. **Snapshot:** Save a snapshot of the current camera image to a USB flash drive (not included).
 5. **Two-Way Audio:** Click to enable two-way talk on compatible cameras (requires two-way audio camera).
 6. **Warning Light — Deterrence Cameras Only:** Click to manually turn on the camera's warning light for 10 seconds.
 7. **Siren — Deterrence Cameras Only:** Click to manually turn on the camera's siren for 10 seconds.
 8. **Remote Device Search:** Manage IP cameras over the network.

8.4 On-Screen Keypads

The **Full Keypad** is used to input alphanumeric characters, such as in user name or password fields. The **Number Keypad** is used to input numeric characters only, such as in the time or date fields.

To use the Full Keypad:

- Using the mouse, click on a field where alphanumeric characters are entered, such as the user name and password fields.
- The Full Keypad opens:
.
- Click **Shift** to switch between uppercase and lowercase characters.
- Right-click to close the Full Keypad.

To use the Number Keypad:

- Using the mouse, click on a field where numeric characters are entered, such as the date or time fields.
- The Number Keypad opens:
.
- Right-click to close the Number Keypad.

8.5 Camera Image Settings

Use the Camera Setting menu to adjust image settings for your cameras.

To adjust image settings:

1. Right-click on the channel you would like to configure and select **Camera Setting**.
.
2. Configure the following settings as needed:

NOTE
The settings listed below are only shown if they are supported on the selected camera. Some camera models do not support all settings.

- **Config File:** Select from image setting presets.
- **Brightness:** Adjust the image brightness.
- **Contrast:** Adjust the image contrast.
- **Saturation:** Adjust the vibrancy of colors in the image.
- **Sharpness:** Adjust the sharpness of the image.
- **Gamma:** Adjust the light-to-dark balance of the image.
- **Mirror:** Select **On** to flip the image horizontally.
- **Flip:** Select **180°** to flip the image vertically, or select **0°** for the default orientation. You can also select **90°** or **270°**.
- **Corridor Mode:** Not supported.
- **BLC Mode:** Select one of the following backlight compensation modes:

- **BLC (Back Light Compensation):** Adjusts the lighting levels in the picture so you can see objects in the foreground if there is a strong light source behind them.
- **WDR (Wide Dynamic Range):** The camera compensates for changes in brightness across the image to enhance the picture quality of both light and dark areas.
- **HLC (High Light Compensation):** The camera dims the brightest areas of the image to make them clearer.
- **Off:** Disable this function.
- **Day&Night Mode:** This setting sets the camera's day/night mode. Select **Color** for the camera to use color mode at all times. Select **Auto** for the camera to automatically determine whether to use color or black and white mode. Select **Black&White** for the camera to use black and white mode at all times.

NOTE
It is recommended to select Auto mode, as using Color mode may impact the camera's performance at night.

- **3D NR:** Select **On** to turn on the camera's noise reduction feature. Noise reduction will ensure a cleaner image, especially at night, and may reduce the amount of disk space required to store video.
- **WB Mode:** This mode allows you to adjust white balance levels for the camera. Choose from the list of preset modes, or select **Auto** to have the system automatically set the optimal white balance mode.
- **Lorex Logo:** Select **Enable** to include a Lorex watermark on the camera image.

3. Click **OK** to save changes.

NOTE
You must save changes to apply settings changes. It is recommended to adjust one setting at a time so you can see the results of each change. Click Default to reset the camera to default image settings.



9 Recording

By default, the system is set to immediately record video from connected cameras continuously, 24 hours a day. You can customize the recording settings according to your needs.

9.1 Video Recording Types


The system supports the following recording types:

- **Continuous recording:** Normal, continuous recording. A **C** icon is shown in the bottom left-hand corner of the camera image when continuous recording is in progress.
- **Motion recording:** Motion-triggered video recording. An **M** icon is shown in the bottom left-hand corner of the camera image when a motion event is being recorded.
- **Smart motion recording:** Smart motion video recording of a person or vehicle. An **S** icon is shown in the bottom left-hand corner of the camera image when a motion event of a person or vehicle is being recorded. For more details on configuring smart motion detection of people and/or vehicles, see [14 Smart Motion Detection](#).

9.2 Configuring Recording Quality

The system uses two video recording streams: a **Main Stream** and a **Sub Stream**. The Main Stream records high quality video to your system's hard drive. The Sub Stream records lower resolution video for efficient streaming to devices over the Internet. You can customize the video quality settings for these streams according to your needs.

To configure recording quality:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **RECORDING**. Click the **Recording** tab on the top panel.



3. Under **Channel**, select the camera you would like to configure.
4. Under **Type**, select the recording type you want to configure the recording quality settings for.
5. Configure the following settings. Except where noted, options for Main Stream and Sub Stream are the same:

- **Compression:** Select the video compression type that will be used. For H.265 compatible cameras, it is recommended to select **H.265**, as it will have the best performance and use the least amount of disk space.
- **Super H.264/5: (Main Stream only)** Enable to reduce system requirements for unimportant recordings to maximize hard drive storage. If you enable, select the **Quality** from **1** (lowest) to **6** (highest).
- **Resolution:** Select the resolution that you want to use to record the selected channel. Higher resolutions create a more detailed image, but take up more hard drive space to record and require more bandwidth to stream to connected computers or mobile devices.



NOTE

Available resolutions for the Main Stream and Sub Stream depend on the model of camera that is connected to the system.

- **Frame Rate (FPS):** Select the frame rate in Frames Per Second (FPS) that each stream will record at. A higher frame rate provides a smoother picture, but requires more storage and bandwidth.
- **Bit Rate Type:** Select **CBR** (Constant Bit Rate) or **VBR** (Variable Bit Rate) to determine the bit rate type. If you select VBR, select the **Quality** from **1** (lowest) to **6** (highest).
- **Bit Rate (Kbps):** Select the bit rate for each recording stream. A higher bit rate results in a better image, but increases the amount of hard drive space or bandwidth required.

NOTE
Recording settings include options for audio recording. For full details, see 20 Connecting Audio Devices .

6. Click **Apply**.
7. **(OPTIONAL)** Click **Copy** to apply the settings for the current channel to one or more other channels.

9.3 Setting the Recording Schedule

You can set a custom recording schedule according to your needs. For example, you can set the system to record continuously during business hours and record on motion detection only outside of business hours.

A custom recording schedule helps reduce the amount of hard drive space required, increasing the time your system can retain recordings.

To configure the recording schedule:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **.**, then click **STORAGE**. Click the **SCHEDULE** tab on the side panel.
3. Under **Channel**, select the channel you would like to configure or select **All**.
4. Configure the schedule as needed:
 - Check **Continuous**, **Motion**, or **Smart Motion** to select the recording type you would like to configure.
 - Click-and-drag on each day to customize the recording schedule. The schedule is set up as a grid, which each block representing one hour.
 - Click **.** beside 2 or more days to link schedules (**.**). This allows you to quickly change multiple schedules at once.
 - To make fine adjustments to a schedule, click **.**. This will allow you to set exact start and end times for a schedule.
 - To disable all recording of the selected type on the selected day, click **.**.
5. Click **Apply**.

9.4 Setting up Scheduled or Manual Recording

You can set the system to record based on a schedule or you can manually turn recording on and off. By default, the system is set to always record on a schedule.

To configure the recording schedule, see [9.3 Setting the Recording Schedule](#).

To set options for manual recording:

1. From the Live View display, right-click to open the Quick Menu. Click **Manual**, then **Record**.
2. Under **Main Stream**, select how the system will record the Main Stream for each channel:
 - **Auto:** Main Stream recording will follow the recording schedule.
 - **Manual:** The system will record the Main Stream continuously as long as this option is checked.

- **Off:** The system will not record the Main Stream for this channel. This option is not recommended.
3. Under **Sub Stream**, select how the system will record the Sub Stream for each channel.
 - **Auto:** Sub Stream recording will follow the recording schedule.
 - **Manual:** The system will record the Sub Stream continuously as long as this option is checked.
 - **Off:** The system will not record the Sub Stream for this channel. This option is not recommended.
 4. Under **Snapshot**, select **Enable** to enable snapshot recording on each channel. Or, select **Disable** to disable snapshot recording.
 5. Click **Apply**.

9.5 Configuring Hard Drive Overwrite

When the hard drive is full, the system will overwrite the oldest recordings by default. This is recommended, as it makes sure that your system will continue to record without any input from you. You can also set the system to stop recording once the hard drive is full.

To configure hard drive overwrite:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **GENERAL** tab on the side panel, then click the **General** tab on the top panel.
3. Ensure **HDD Full** is set to **Overwrite** to overwrite the oldest recordings when the hard drive is full.

NOTE
Select Stop Record for the system to stop recording when the hard drive is full.

4. Click **Apply**.


10 Playback

Search through and playback recorded video files on the system.

10.1 Playing Back Video from the Hard Drive


To play back recorded video:



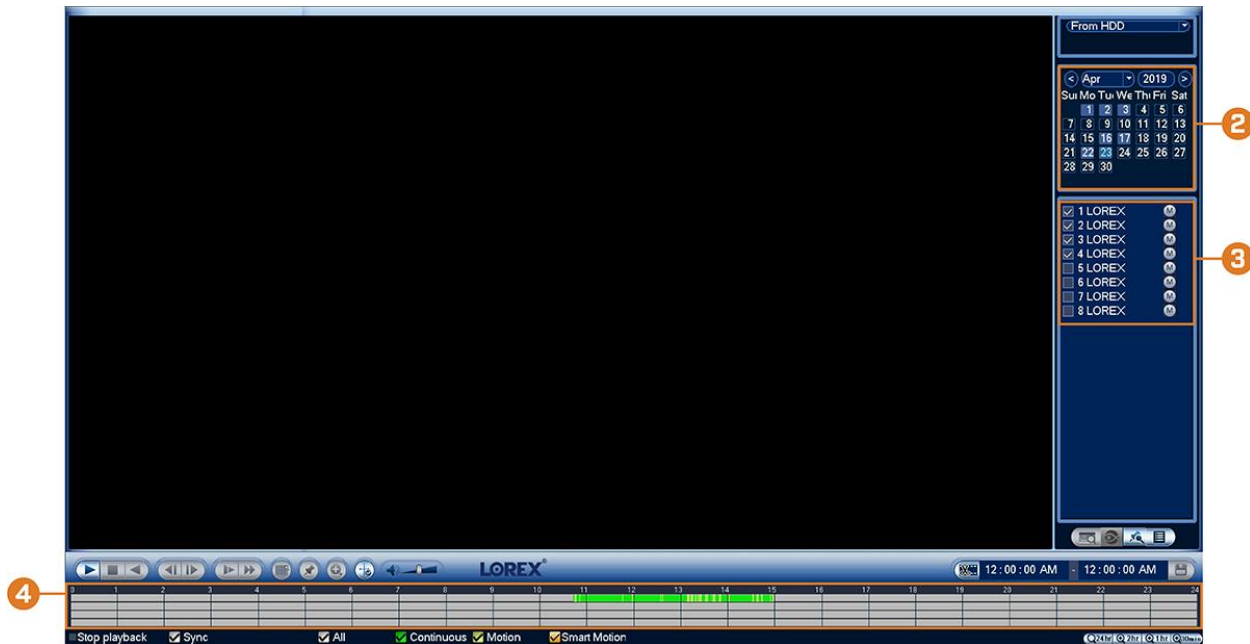





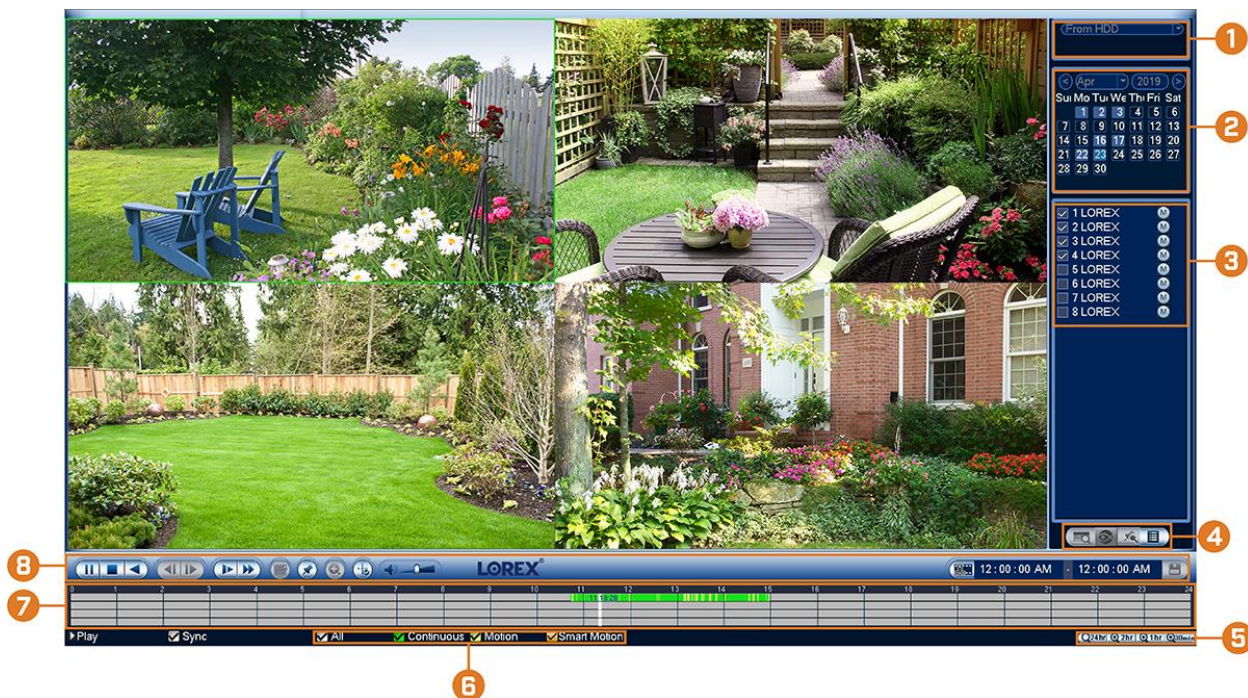

1. From the Live View display, right-click to open the Quick Menu, then click **Playback**.









2. Use the calendar on the right to select the day to playback.
3. Check the channels you want to play back. Click the icons to the right of each channel name to choose the video quality (M for Main Stream, S for Sub Stream).
4. Click inside the video bar to select the playback time. The system will begin playing back video from the selected time.


10.2 Playback Controls



1. **Select Playback Device:** Choose between searching the recorder's hard drive or a USB flash drive (not included).
2. **Calendar:** Select the date to playback.
3. **Channel Selection:** Select channels and video quality for playback.
4. **Viewing Modes:**
 -  **Not supported**
 -  **Not supported**
 -  **Bookmark List:** Shows all bookmarked recordings for a single channel on the selected date.
 -  **File List:** Shows all available recordings for the selected date and channel(s) in list format.
5. **Zoom Playback Bar:** Select the scope of the playback bar.
6. **Recording Type Filters:** Click to show/hide recording types.
7. **Playback Bar:** Click inside the bar to select a playback time.
8. **Playback Controls:**
 -  **Play / Pause**
 -  **Stop**
 -  **Play Backwards**
 -  **Previous Frame:** Go to the previous frame when video is paused.
 -  **Next Frame:** Go to the next frame when video is paused.
 -  **Slow Playback:** Click repeatedly to slow the video down by half speed up to 16x slower than normal. Click again to return to regular speed.

-  **Fast Playback:** Click repeatedly to double the speed of the video up to 16x faster than normal. Click again to return to regular speed.
-  **Area Search:** Click to select an area of the camera image and play back all recordings with motion in the selected area. For full details, see [10.3 Area Search](#).
-  **Add Bookmark:** Shows.
-  **Digital Zoom:** Click to enable digital zoom. Click-and-drag over the camera image to zoom in on the selected area. Right-click to return to the full camera image. You can then repeat to zoom in on a different area, or click the icon again to disable zoom.
-  **Show/Hide Smart Search Rules:** Click to show/hide active areas for smart detection of people and vehicles during playback.
-  **Volume / Mute:** Click on the volume bar to set the volume for audio in playback. Click the icon to mute/unmute.

NOTE	
<ul style="list-style-type: none"> ▪ You must be viewing an audio camera in single channel to hear audio. You must also be using an HDMI monitor with built-in speakers, or connect an external speaker to the recorder in order to hear audio. 	
<ul style="list-style-type: none"> ▪ Audio recording and / or use of listen-in audio without consent is illegal in certain jurisdictions. Lorex Corporation assumes no liability for use of its products that does not conform with local laws. 	

-  **Video Clip:** Back up a custom video clip to a USB flash drive (not included). For full instructions, see [10.4 Video Clip Backup](#).

10.3 Area Search

Play back all recordings from a single channel with motion in a specific area of the camera image.

To perform an area search:

1. From the Live View display, right-click to open the Quick Menu, then click **Playback**.
2. Use the calendar on the right to select the day to playback.
3. Check a single channel you want to play back. Click the icon to the right of the channel name to choose the video quality (for Main Stream, for Sub Stream).
4. Click inside the video bar to select the playback time. The system will begin playing back video from the selected time.
5. Click to configure an area for Smart Search.
6. The icon changes to , and the camera image appears with a grid overlay. Click or click-and-drag to add / remove squares from the grid. Solid blue areas mark the part of the image that will be searched for motion events.
7. Click to begin Smart Search.

10.4 Video Clip Backup

Video clip backup allows you to select a duration of video during playback mode and save it to a USB device (not included).

To use video clip backup:

1. Connect the USB thumb drive (not included) to a free USB port on the recorder.
2. From the Live View display, right-click to open the Quick Menu, then click **Playback**.
3. Use the calendar on the right to select the day to playback.
4. Check the channels you want to play back. Click the icons to the right of each channel name to choose the video quality (for Main Stream, for Sub Stream).
5. Click inside the video bar to select the playback time. The system will begin playing back video from the selected time.
6. Click to mark the beginning of the video clip, then click again to mark the end of the video clip.
7. Click to open the backup menu.
8. Select a filetype for your backup file.
9. Click **Backup**.

10.5 Playing Back Video from a USB Drive

If you have video files saved to a USB flash drive (not included), you can play them back using the system.

For full instructions on backing up video to a USB flash drive, see [11 Backup](#).

To play back video from a USB flash drive:

1. Connect the USB thumb drive (not included) with video files on it into a free USB port on the recorder.
2. From the Live View display, right-click to open the Quick Menu, then click **Playback**.
3. Click the dropdown and select **From IO Device**.
4. Click **Browse** to locate the video file on your USB flash drive.
5. Double-click the video file you want to open from the file list to start playback.




11 Backup

Backup video files to external USB flash drive (not included).

11.1 Formatting the USB Flash Drive

It is recommended to format your USB thumb drive (not included) before using it with the system.


**CAUTION**


Formatting the USB device will permanently erase all data. **This step cannot be undone.**

Prerequisite:


- Connect a USB flash drive (not included) to a free USB port on the unit.

To format a USB flash drive:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click  , then click **BACKUP**.

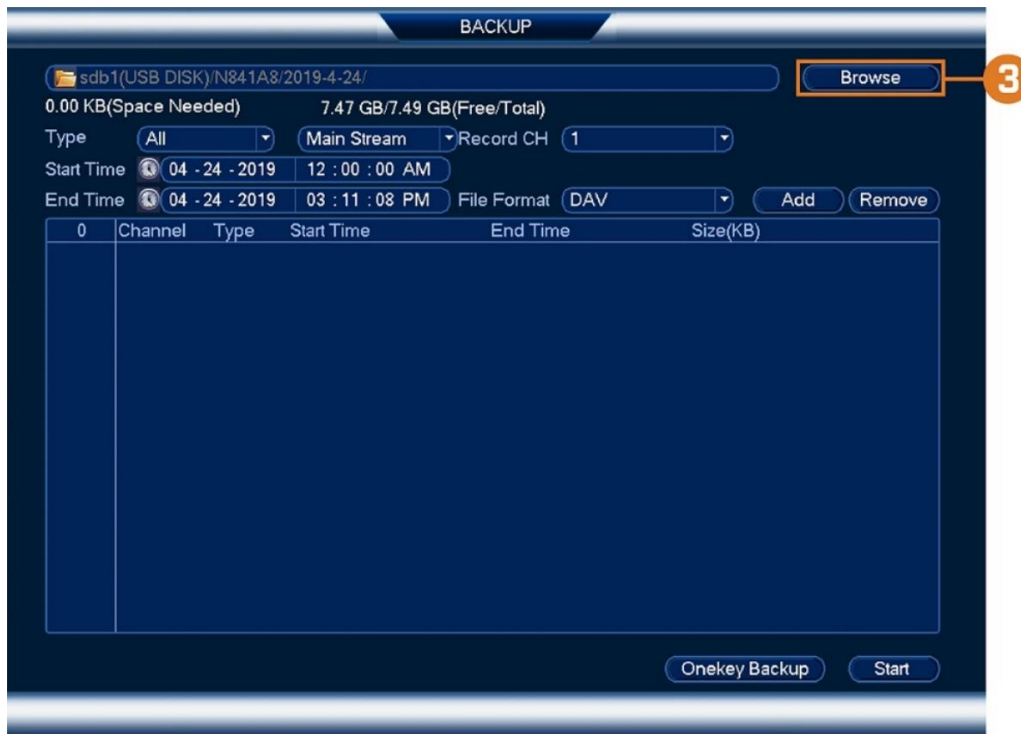

3. Click **Browse** to locate the USB drive you want to format.

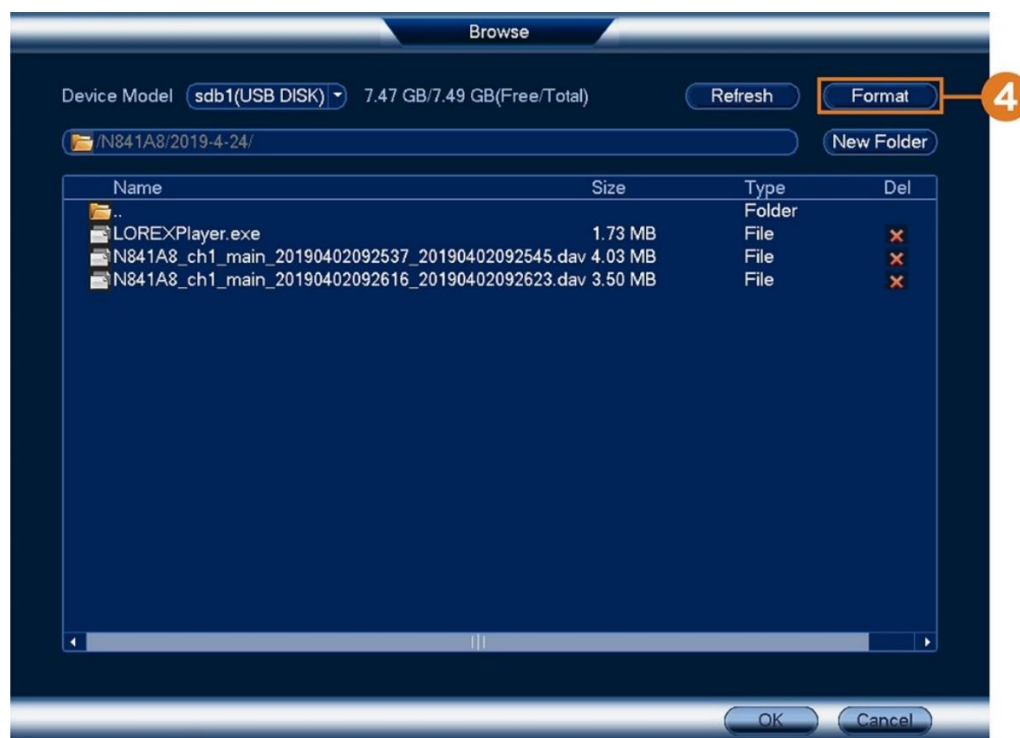

4. Select the correct drive, then click **Format**.
5. Select a format mode:
 - **FAT32:** Recommended — offers the greatest compatibility with other devices.
 - **NTFS:** Advanced users only — should only be used on drives larger than 32GB where file sizes will be larger than 4GB.
6. Click **OK**.


11.2 Backing Up Video

You can save video recordings from your system to a USB flash drive. Ensure you format new drives before backing up video (see [11.1 Formatting the USB Flash Drive](#) for details).

To back up video:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.

- Click , then click **BACKUP**.

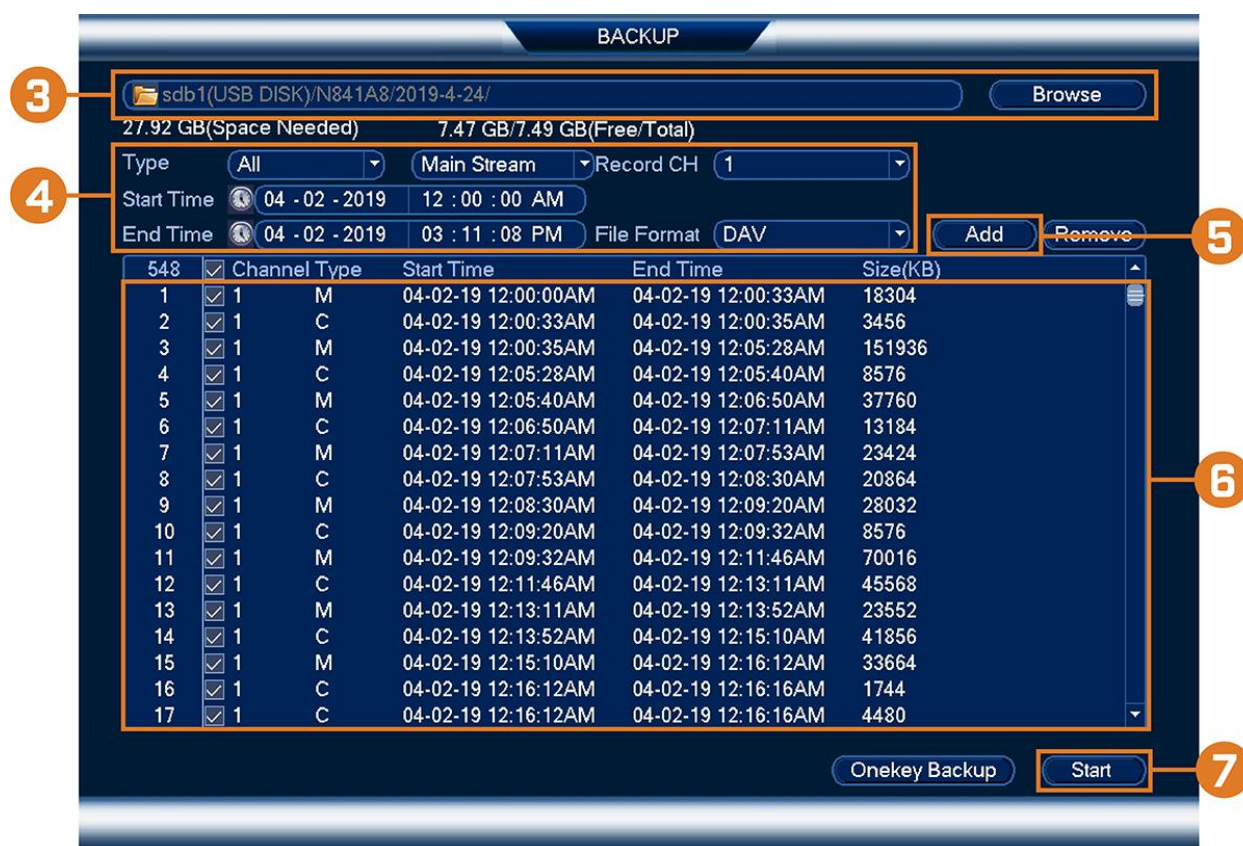

- Click **Browse** to select the USB backup device and the folder to save your backup files to.
- Configure the following:
 - Type:** Select the recording type you would like to search for or select **All** to search all recording types.
 - Record CH:** Select the channel you would like to search or select **All** to search all channels.
 - Start Time / End Time:** Select the start and end time for your search.
 - File Format:** Select **DAV** to save files to save files to **.dav** format. You can playback **.dav** files using the Lorex video player software.
- Click **Add**. A list of files that match your search criteria appears.
- Check files you would like to backup.
- Click **Start**

NOTE

HD video files saved on the system may take up a large amount of disk space. The size of video files selected and the amount of free space on your USB device is shown on screen.

11.3 Using Video Clip Backup

Video clip backup allows you to select a duration of video during playback mode and save it to a USB device (not included). For full instructions on video clip backup, see [10.4 Video Clip Backup](#).

11.4 Viewing Backed Up Files

Use the free Lorex Player to play back **.dav** files.

11.4.1 Viewing Backed Up Files on PC

1. Download and install the **Lorex Player for PC** from the recorder's product page at lorex.com
2. Double-click one of the files on the left to begin playback.

OR

Click to open a back up video file in another location

3. Use the **Lorex Player** controls to control playback or select other files for playback.

NOTE
For a full overview of Lorex Player controls, see 11.4.3 Lorex Player Controls .

11.4.2 Viewing Backed Up Files on Mac

1. Download and install the **Lorex Player for Mac** from the recorder's product page at lorex.com
2. Double-click the downloaded file in Safari to extract the **Lorex Player** app file.
3. Drag the **Lorex Player** app to your Desktop or Applications list. Double-click **Lorex Player** to open the application.
4. Double-click one of the files on the left to begin playback.

OR

Click to open a back up video file in another location

5. Use the **Lorex Player** controls to control playback or select other files for playback.

NOTE
For a full overview of Lorex Player controls, see 11.4.3 Lorex Player Controls .

11.4.3 Lorex Player Controls

1. **File List:** Double-click to open a file.
2. **Viewing Mode:** Select between single-channel viewing and various split-screen options.
3. **Hide/Show File List**
4. **Playback Controls:**
 - : Playback files in sequence.
 - : Synchronize playback times.
 - : Play/pause playback.
 - : Stop playback.

- : Previous frame.
- : Next frame.
- : Playback speed.
- : Volume control.

5. **Zoom Timeline**

6. **Display Area:** Double-click a video file to expand. Click the controls inside the display area to do the following:

- : View information about the video file.
- : Start/stop a manual recording from the video file.
- : Take a snapshot from the video file.
- : Close the video file.

7. **Add Files:** Click to open backed up video files.

8. **Export Files:** Export a video file to a different format.

9. **Digital Zoom:** Click, then click-and-drag over a camera image to zoom in. Right-click to return to the full image.

10. **Drag:** Click, then click-and-drag to move around a camera image that has been digitally zoomed in.

11. **Fullscreen:** Click to open the player in full screen. Press **ESC** to exit full screen.

12. **Settings:** Click to open the configuration menu for the player. From here you can control the default file formats and save locations for snapshots and control the aspect ratio.



12 Motion Detection

Configure motion detection settings to ensure that events are captured according to your preferences.


12.1 Status Icons

The system displays different icons in the bottom left-hand corner of the camera image to inform you of motion detection events:

- **Motion detection:** Motion has been detected by the camera. An **M** icon is shown in the bottom left-hand corner of the camera image to show that motion was detected, but the system is not recording a motion event. This is because motion recording is not enabled on the channel, or the movement detected by the camera was not significant enough to trigger motion recording. See [12.2 Configuring Motion Detection](#) to configure settings for motion detection and recording.
- **Motion recording:** Motion-triggered video recording. An **M** icon is shown in the bottom left-hand corner of the camera image when a motion event is being recorded.

12.2 Configuring Motion Detection


Set preferences for motion detection per channel.

	NOTE
<p>This chapter covers motion detection settings only. See the references below for full instructions on the other submenus shown below:</p> <ul style="list-style-type: none">• Video Loss: See 16.4.8 Configuring Video Loss Settings.• Deterrence: See 13 Active Deterrence.• Hard Drive Warnings: See 16.4.9 Configuring Hard Drive Warnings.• Network Warnings: See 16.4.10 Configuring Network Warnings.	

To configure motion detection:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.


2. Click , then click **EVENT**.

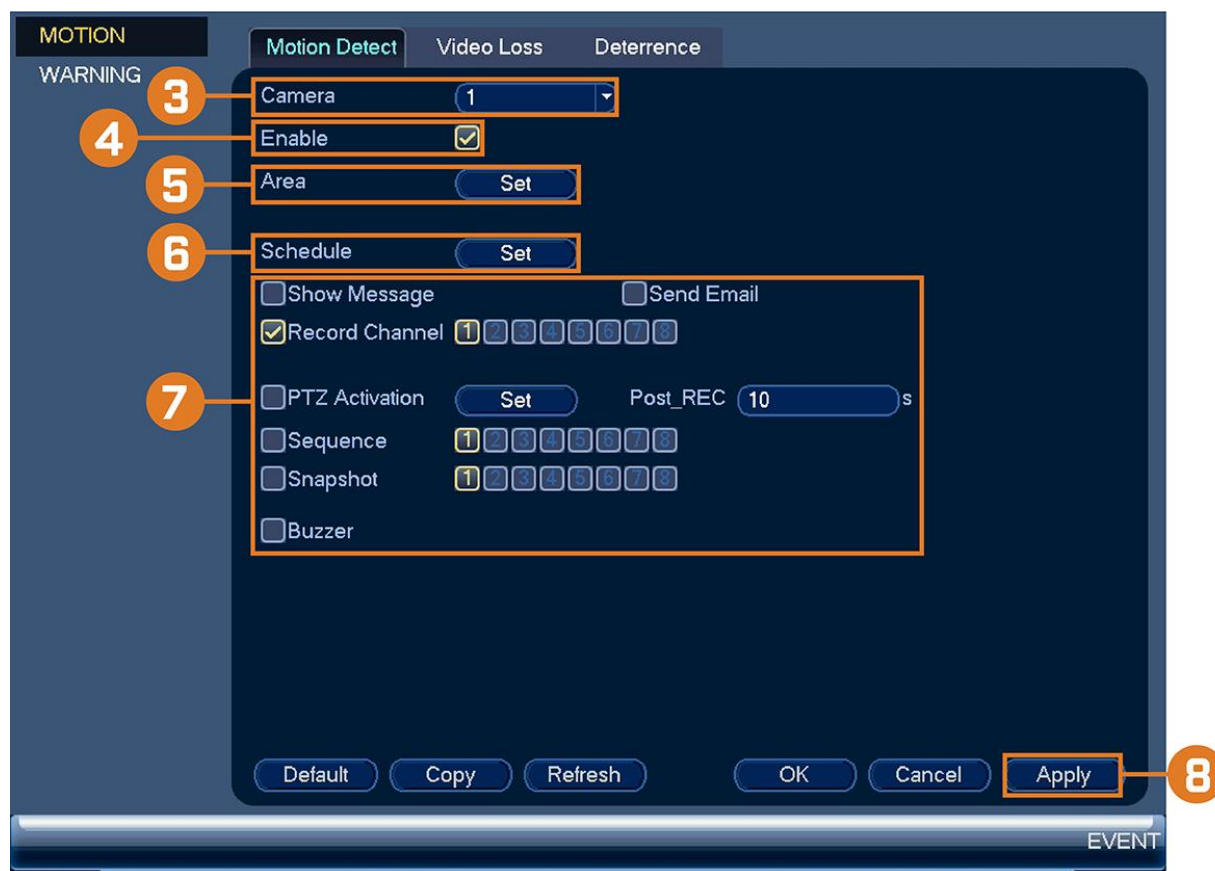

3. Select a channel to configure motion detection for.

4. Check to enable motion detection on the selected channel.

5. Click **Setup** next to **Area** to configure which areas of the image will be enabled for motion detection. A grid will appear on the monitor:

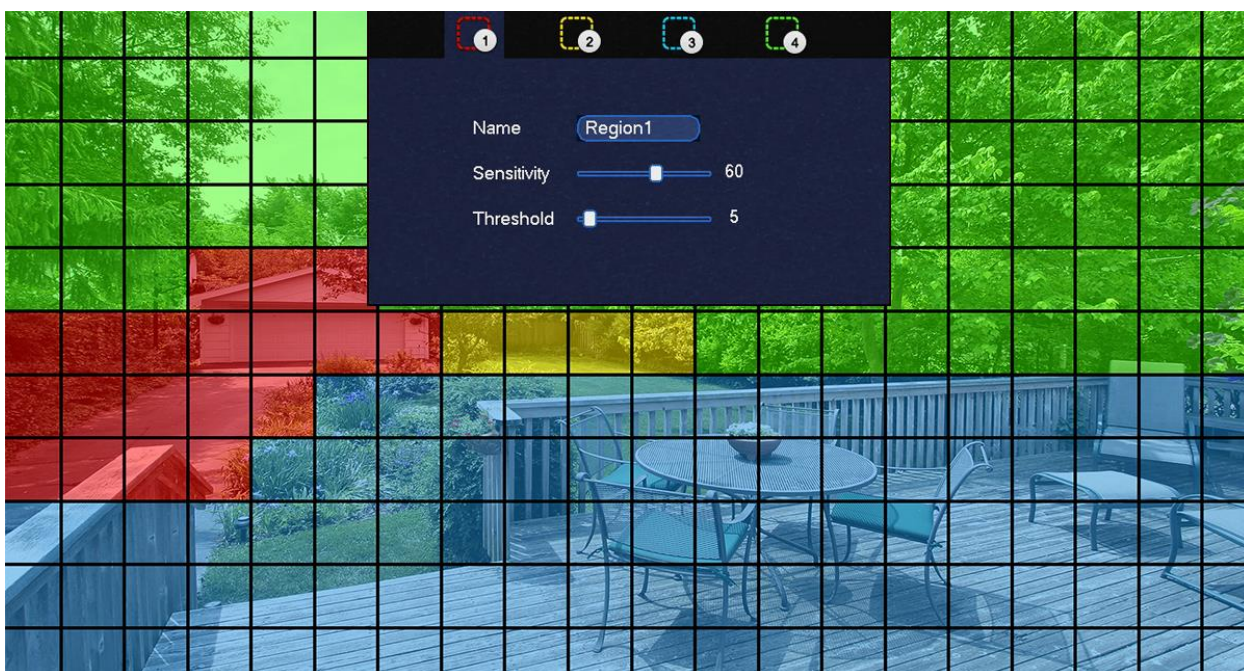

- The camera image appears with a red grid overlay. This means the entire image is enabled for motion detection.

- Click or click-and-drag to add / remove boxes from the active area. Cells that have been removed from the active area appear green.
 - Hover near the top of the image to reveal zone selection. You can set up to 3 different zones with different sensitivity and threshold values.
 - Right-click when finished.
6. Click **Setup** next to **Schedule** to choose which days and times of the week to enable motion detection:
- Click or click-and-drag along the each of the yellow timelines to quickly add or remove time from each day's schedule in 15-minute segments.
 - Click . beside 2 or more days to link schedules (). This allows you to quickly change multiple schedules at once.
 - To make fine adjustments to a schedule, click **Set**. This will allow you to set exact start and end times for a schedule.
7. Choose how the system will react when motion is detected:
- **Show Message:** Check to enable an on-screen pop-up when one of your cameras detects motion. On-screen pop-up shows the channels an event occurred on and the type of event.
 - **Send Email:** Check to enable email alerts. You must configure email alerts before you will be able to receive them (see [16.4.4 Configuring Email Alerts](#)).
 - **Record Channel:** Select the channels that will record when motion is detected on the selected channel. Set the length of recording following a video loss event in the **Post_REC** field.
 - **PTZ Activation:** Set connected PTZ cameras to start a tour, pattern, or go to a preset location.
 - **Sequence:** Sequence mode will begin. Select the numbered tiles next to this option to include the corresponding channels in the sequence.
 - **Snapshot:** Select the numbered tiles next to this option to save a snapshot of the corresponding channels.
 - **Buzzer:** Check to enable the system buzzer.
8. Click **Apply**.

13 Active Deterrence

Lorex Active Deterrence cameras feature bright, customizable warning lights and a remote-triggered siren. The recorder allows you to customize automatic light-triggering when motion is detected to deter intruders (see [13.1 Automatic Deterrence Settings](#)). You can also trigger the lights and sirens manually using the recorder or Lorex Home connectivity software (see [13.2 Manually Activate Deterrence Features](#)).

For a complete list of compatible deterrence cameras, navigate to your recorder series at lorex.com/compatibility.




13.1 Automatic Deterrence Settings


Set preferences for automatic warning light triggering on compatible Lorex deterrence cameras.

To configure deterrence settings:

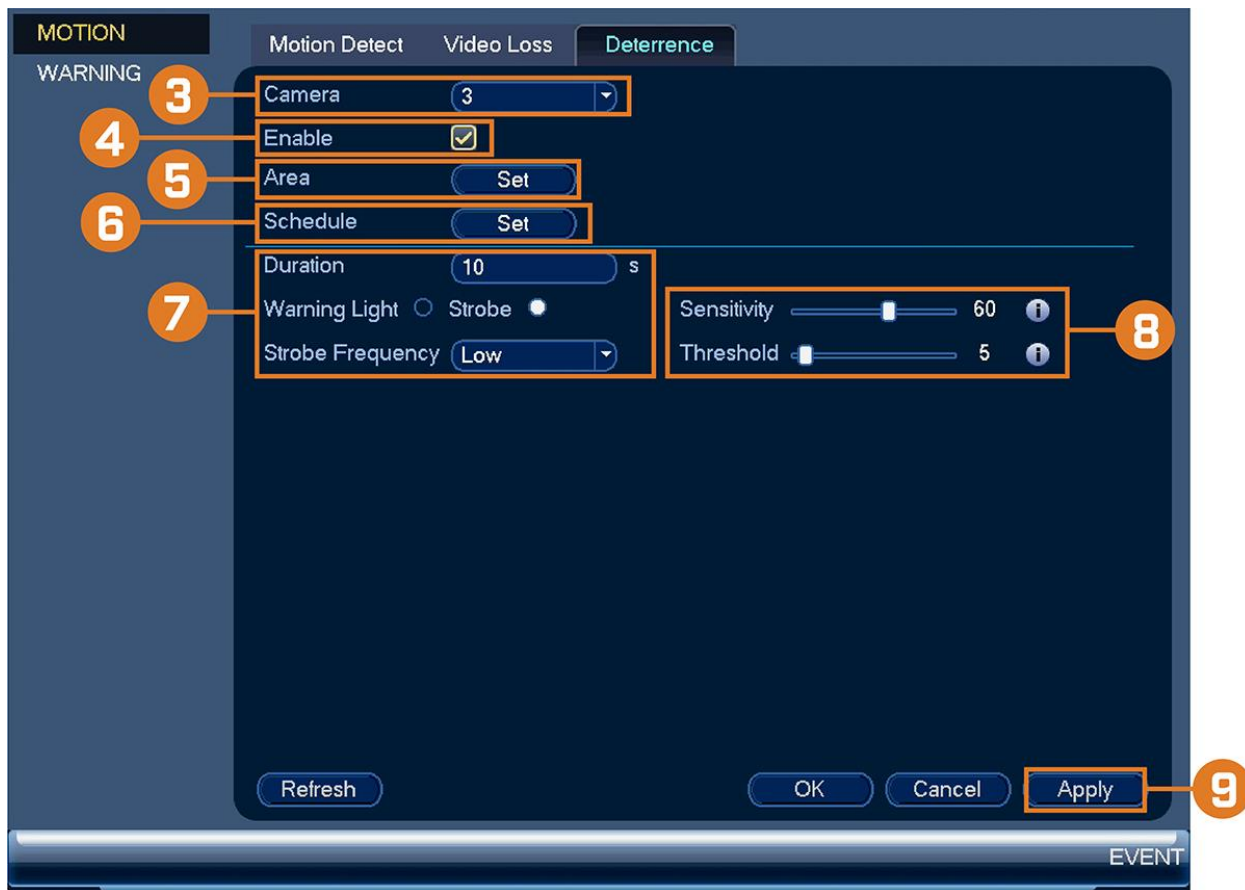

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **ALARM**. Click the **MOTION** tab on the side panel, then **Deterrence** on the top panel.

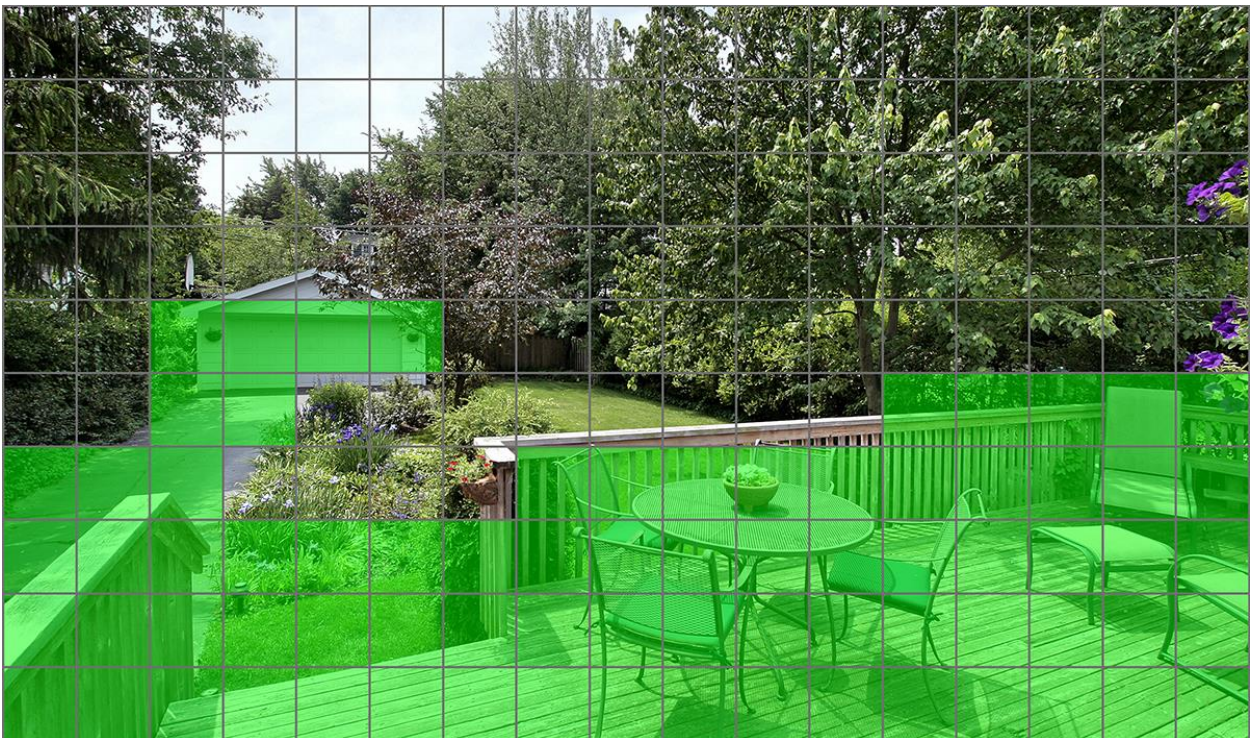

3. Select the channel of a connected deterrence camera.
4. Check **Enable**.
5. Click **Set** next to **Area** to set an active area for automatic deterrence.





- The camera image appears with a grid overlay. The green area is the active area for deterrence.

- Click or click-and-drag to add / remove boxes from the active area.
 - In the example image above, only motion around the garage or on the porch will trigger the warning light.
 - Right-click when finished.
6. Click **Set** next to **Schedule** to set the weekly schedule for automatic deterrence.
- Click or click-and-drag along the each of the yellow timelines to quickly add or remove time from each day's schedule in 15-minute segments.
 - Click  beside 2 or more days to link schedules (). This allows you to quickly change multiple schedules at once.
 - To make fine adjustments to a schedule, click **Set**. This will allow you to set exact start and end times for a schedule.
 - Click **OK** when finished.
7. Configure preferences for the warning light:
- **Duration:** Choose how long the warning light will stay on when motion is detected.
 - Select **Warning Light** for a solid white light, or **Strobe** for a flashing light. If you select **Strobe**, set how quickly the light will flash under **Strobe Frequency**.
8. Set the sensitivity and threshold for deterrence features:
- **Sensitivity:** The amount of activity required to classify an on-screen event as motion. A higher sensitivity will classify even small movements as motion events, and trigger the warning light.
 - **Threshold:** The level at which a motion detection event triggers the warning light. A lower threshold will trigger the warning light even for small objects.
9. Click **Apply**.

13.2 Manually Activate Deterrence Features


The system has multiple options for activating deterrence features.

To activate deterrence features on a single camera:

- Hover the mouse pointer near the top of the camera image in Live View to reveal the Camera Toolbar. Click  to activate the warning light, or  to activate the siren.

- Activate deterrence features using the Lorex Home app. For details, see [17 Connecting Remotely using the Lorex Home Mobile App](#).

To activate deterrence features on all connected cameras:

- Push and hold the front panel panic button on the recorder for 3 seconds.
- From the Live View display, click  on the Navigation Bar.



14 Smart Motion Detection

The system supports detection of people and vehicles to deliver more relevant notifications when using the Lorex Home app for remote viewing. You can also link white light deterrence to person and/or vehicle detection on compatible Lorex deterrence cameras for an added level of smart security.



14.1 Configuring Person & Vehicle Detection

Set preferences for person and/or vehicle detection per channel.




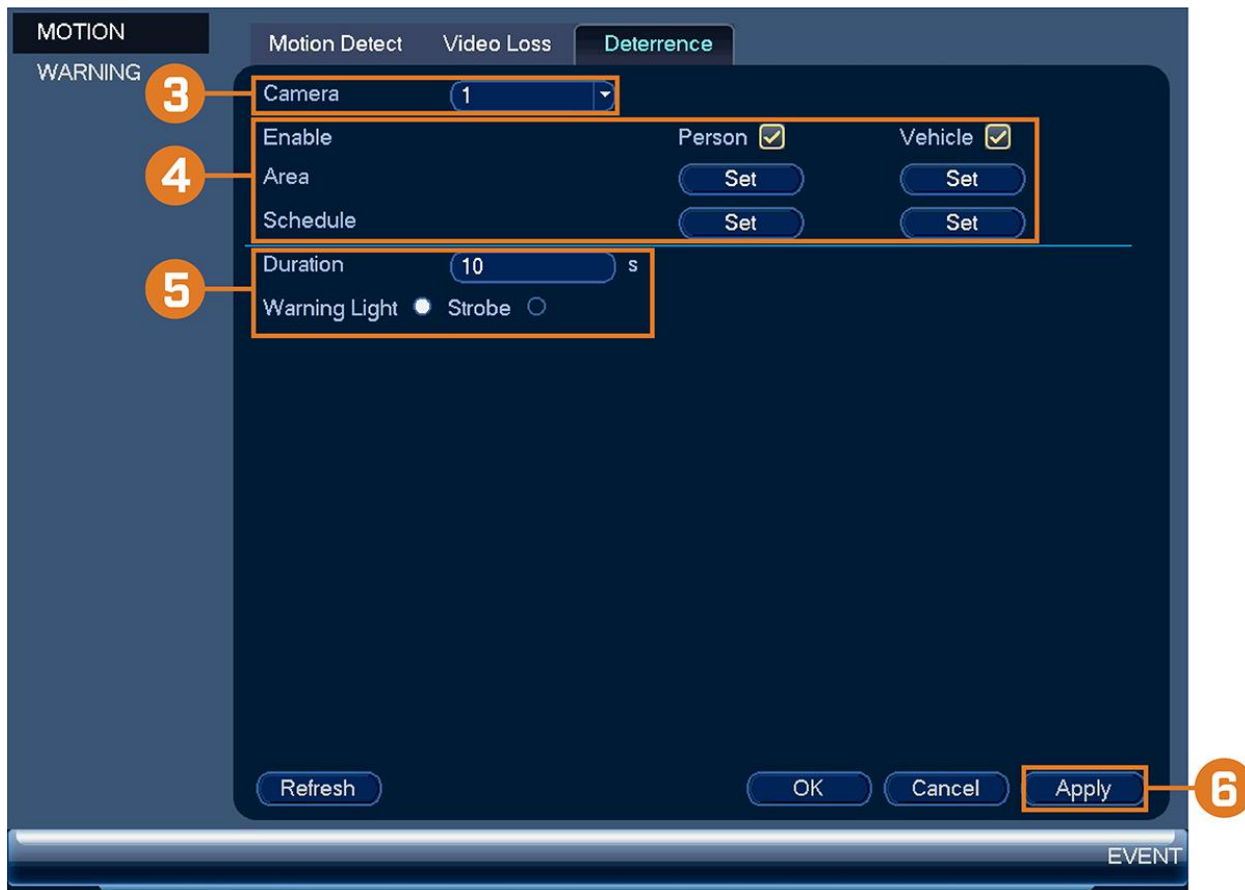
NOTE

This chapter covers motion detection settings only. See the references below for full instructions on the other submenus shown below:

- **Motion Detection:** See [12 Motion Detection](#).
- **Video Loss:** See [16.4.8 Configuring Video Loss Settings](#).
- **Hard Drive Warnings:** See [16.4.9 Configuring Hard Drive Warnings](#).
- **Network Warnings:** See [16.4.10 Configuring Network Warnings](#).

To configure person and/or vehicle detection:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **EVENT**. Click the **MOTION** tab on the side panel, then click **Deterrence** on the top panel.



3. Select the channel you would like to configure smart detection for.
4. Configure the following:
 - **Enable:** Check **Person** or **Vehicle** or both to enable each type of smart detection.
 - **Area:** Click **Set** under each detection type you have enabled to set the active area for detection.



- Click **Add** to set an area for person or vehicle detection on the selected channel. Click-and-drag the corners to resize the area.

- For most accurate results, set an area where objects of interest will move within the bounding box as well as into / out of.
 - Check **Light** next to a rule to flash the camera's warning light when an object is detected.
 - See [5.2 Ensuring Accurate Person & Vehicle Detection](#) for optimal camera positioning for person and vehicle detection.
- **Schedule:** Click **Set** under each detection type you have enabled to set the weekly schedule for detection.

	0	2	4	6	8	10	12	14	16	18	20	22	24	
<input type="checkbox"/> All														
<input type="checkbox"/> Sun														Set
<input type="checkbox"/> Mon														Set
<input type="checkbox"/> Tue														Set
<input type="checkbox"/> Wed														Set
<input type="checkbox"/> Thu														Set
<input type="checkbox"/> Fri														Set
<input type="checkbox"/> Sat														Set

Default OK Cancel

5. If you choose to flash the camera's warning light when a person or vehicle is detected, configure the following warning light options:
- **Duration:** Enter the time in seconds the warning light will remain on after a person or vehicle is detected.
 - **Warning Light / Strobe:** Choose **Warning Light** to use a solid white light, or **Strobe** for a flashing light. If you select **Strobe**, choose the **Strobe Frequency** to determine how quickly the warning light will flash when triggered.
6. Click **Apply**.

14.2 Searching for Person & Vehicle Detection Events (Smart Search)

Smart Search lets you filter recorded video to search for person detection events, vehicle detection events, or both.

NOTE
In order to use Smart Search, you must configure at least one channel's smart detection settings. See the procedure above for full instructions.

To perform a Smart Search:

1. From the Live View display, right-click to open the Quick Menu, then click **Smart Search**.

- 2. Select a channel to search for detection events from, or select **All**.
- 3. Enter a start and end time for your search.
- 4. Next to **Event Type**, select **Person**, **Vehicle**, or **All**.
- 5. Click **Smart Search**.

- 6. Events that match your search criteria are displayed. You now have the following options:
 - Click a thumbnail to preview the event. Double-click the preview window to view in full screen.
 - Check thumbnails to perform other actions:
 - : Back up events.
 - : Lock events.
 - : Bookmark events.



15 Managing Passwords and User Accounts

Passwords are enabled by default and are required to access the Main Menu or connect to the system using a computer or mobile device. You will be prompted to create a custom password after you connect for the first time.



NOTE

If you forget the password to the system, contact technical support to have it reset.

15.1 User Accounts


The system includes the following default accounts:

- **admin:** The administrator account has full access to the system, may configure all system settings, and can manage user accounts.
- **user:** User accounts are secondary accounts which can be assigned limited access to system settings and camera feeds.

15.1.1 Changing Passwords

You can change the system password of the administrator and user accounts.

To change an account password:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.


3. Click  next to the account you want to change the password for.



4

5

4. Configure the following:
- **Modify Password:** Check to modify password.
 - **Old Password:** Enter the current password.
 - **New Password:** Enter the new password you want to use for the system.

	NOTE
	Passwords for the system must be a minimum of 8 characters, and must include at least 2 of the following character types: lowercase, uppercase, numeric, and special characters.


- **Confirm Password:** Re-enter the new password.
5. Click **OK**.


15.1.2 Adding Users

You can allow multiple users to log in to the system. When adding different users, you can assign what menus they have access to. For example, you may want your friend to monitor your system while you are away, while not giving full access to your system.

To add a user:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.

2. Click  , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.

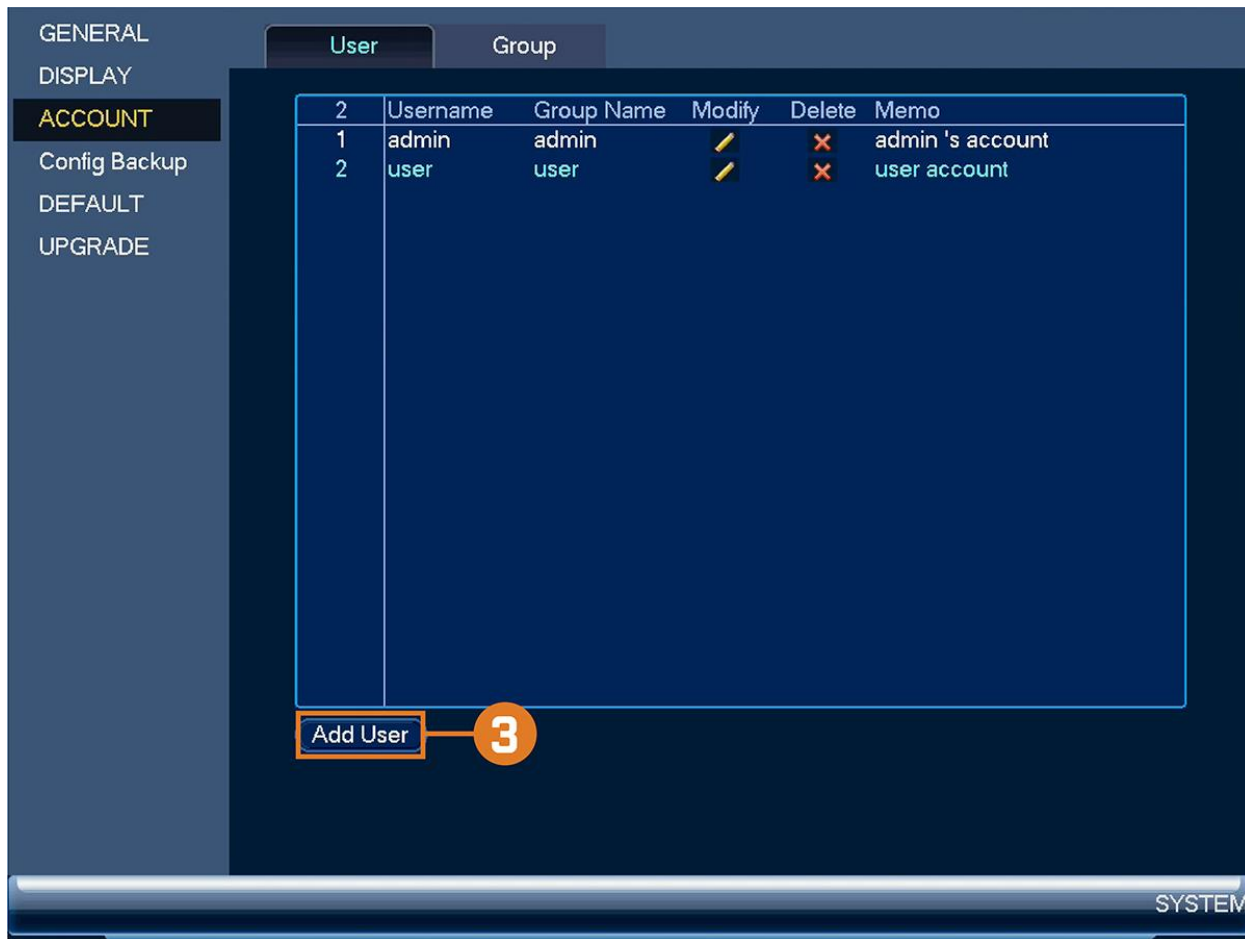

3. Click **Add User**.

4. Configure the following:

- **Username:** Enter a name for the user account.
- **Password:** Enter a password for the user account. Enter the password again under **Confirm Password**.
- **Memo:** (Optional) Enter a description of the user account.
- **Group:** Select the group you would like to assign to this user account. A user account cannot be given permissions its group does not have.
- **Authority:** Check the permissions you would like the user account to have. Under the **System** tab, select the menus the user account may access. Under the **Playback** tab, select which channels the user account may access recorded video from. Under the **Covert** tab, select the channels the user account may view live video from.

5. Click **OK**.



NOTE

Now, you can log in to the system locally, or remotely using the user name and password you created. When logging into the system with a user account, the user will only have access to the menus you assigned.

15.1.3 Modifying Users

Modify account details, such as account username or permissions.



To modify a user:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.
3. Click  next to the account you want to modify.
4. Update account details as needed, then click **OK**.

15.1.4 Deleting Users

Remove a user from the system.

To remove a user:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.
3. Click  next to the account you want to delete.
4. Click **OK**.

15.2 Account Groups

Account groups can be used to easily manage permissions for multiple user accounts. User accounts can be given all the permissions of a group, but cannot be given permissions that the group does not have.


The system includes the following groups by default:

- **admin**: Accounts in the admin group are system administrators. They have full access to the system, may configure all system settings, and can manage user accounts.
- **user**: Accounts in the user group are normal users. They have limited access to system menus.

15.2.1 Adding Groups

Add a new group with unique system permissions.

To add a group:



1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.
3. Click **Add Group**.

4. Configure the following:
 - **Group Name:** Enter a name for the group.
 - **Memo:** (Optional) Enter a description of the group.
 - **Authority:** Check the permissions you would like the user account to have. Under the **System** tab, select the menus the user account may access. Under the **Playback** tab, select which channels the user account may access recorded video from. Under the **Covert** tab, select the channels the user account may view live video from.
5. Click **OK**.

15.2.2 Modifying Groups

Change an existing group's name or permissions.



To modify a group:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.
3. Click  next to the group you want to modify.
4. Update group details as needed, then click **OK**.

15.2.3 Deleting Groups

Remove a group.

To delete a group:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **ACCOUNT** tab on the side panel, then click **User** on the top panel.
3. Click  next to the group you want to delete.
4. Click **OK**.




16 Using the Main Menu

To open the main menu:

- From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.

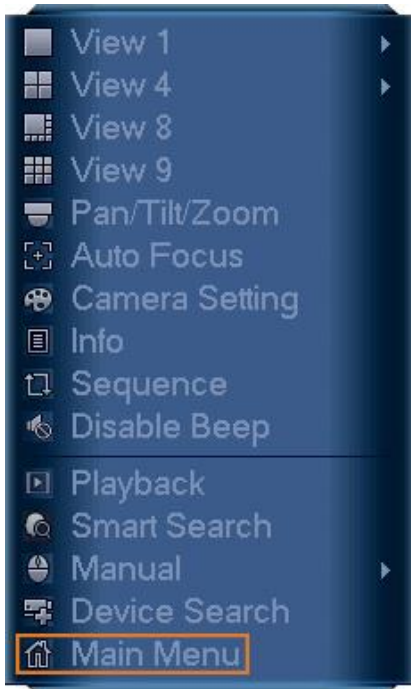

OR

- From the Live View display, hover the mouse near the bottom of the screen, then click  on the Navigation Bar.



16.1 Main Menu Overview



1. **Playback:** Search for and play back recordings, or search for person and/or vehicle detection events. For full details, see [10 Playback](#).
2. **Backup:** Export recordings and snapshots to a USB flash drive (not included). For full details, see [11 Backup](#).
3. **Camera:** Open the menu to manage IP cameras connected to the network, set recording parameters, and assign custom titles for your cameras.
4. **Information:** View system information.
5. **Settings:** Configure general system settings, recording schedule, motion settings, and more.
6. **Shutdown:** Logout, restart, or shutdown the system.

16.2 Camera Menu

The Camera Menu allows you to manage IP cameras, set recording parameters, and assign custom titles for your cameras.

16.2.1 Viewing Camera Status

View the connection and alarm status for all connected cameras.

To view camera status:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **REMOTE DEVICE**. Click the **STATUS** tab on the side panel.

16.2.2 Camera Firmware Versions

View firmware versions for connected cameras.

To view camera firmware versions:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **REMOTE DEVICE**. Click the **FIRMWARE** tab on the side panel.


16.2.3 Upgrading Camera Firmware

You can update the firmware for connected IP cameras through the NVR. Firmware upgrades provide enhanced functionality for the cameras. Typically, a camera firmware upgrade will not be necessary unless directed to do so by technical support.

To upgrade the camera firmware:

1. Download the camera firmware file.

NOTE
Make sure that the firmware file you are using is compatible with your IP camera model.

2. Extract the firmware file and copy it to a USB thumb drive (not included).
3. Insert the USB thumb drive (not included) into a USB port on the system.
4. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
5. Click , then click **REMOTE DEVICE**. Click the **IPC UPGRADE** tab on the side panel.
6. Click **Select**. Select the firmware file on the USB drive and click **OK**.
7. Check the cameras you would like to apply the upgrade to in the list and then click **Start Upgrade**.


CAUTION
Wait for the firmware upgrade to complete before turning off or unplugging the cameras or NVR. The cameras will restart during the firmware update process.

16.2.4 Configuring Snapshot Recording Settings

The system can be set to record snapshot images when a camera detects motion. These snapshots can be viewed through the Playback menu or can be attached to email alerts and push notifications. Use the following procedure to set the snapshot parameters for each camera.

NOTE
Snapshot recording must be enabled for motion detection in the Event menu. See 12 Motion Detection for details.

To configure snapshot recording settings:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **RECORDING**. Click the **Snapshot** tab on the top panel.
3. Under **Snapshot**, select the number of snapshots the system will take when the snapshot button is pressed.
4. Configure the following settings for snapshots saved automatically from motion detection or the snapshot schedule:
 - **Channel:** Select the channel you would like to configure.
 - **Mode:** Select **Timing** for the system to take snapshots at fixed intervals throughout the day, or select **Trigger** for the system to take snapshots only when triggered by motion detection (snapshot recording must be enabled in the motion detection menu - see [12 Motion Detection](#) for details).

- **Image Size:** The image size is the same as the Main Stream resolution of the camera.
 - **Image Quality:** Select the snapshot image quality between **1** (lowest) and **6** (highest)
 - **Interval:** Enter the time between snapshots in seconds.
5. Click **OK** to save changes.

16.2.5 Configuring Video Overlay Settings

The Overlay tab allows you to configure the text and information that appears ovetop of the camera image, such as time and channel display.


To configure video overlay settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **RECORDING**. Click the **Overlay** tab on the top panel.
3. Under **Channel**, select the camera you would like to configure.
4. Configure the following settings:
 - **Time Display:** Check to display the time information during live view. Click **Set** next to **Time Display** to choose the position of the time display overlay. Click-and-drag the time display to reposition it. Right-click when finished.
 - **Channel Display:** Check to display the channel information. Click **Set** next to **Channel Display** to choose the position of the channel display overlay. Click-and-drag the channel display to reposition it. Right-click when finished.
 - **Cover-Area:** Check to hide certain parts of the camera image in video recordings. Click the numbered boxes under the **Cover-Area** checkbox, representing the number of black boxes (masks) that will appear on the camera image. Click **Set** next to **Cover-Area** to choose the position of the mask overlay. Click-and-drag masks to reposition them, or click-and-drag the edges to resize a mask. Right-click to exit the live screen.
 - **Lorex Logo:** Check to display a Lorex logo watermark on the selected channel. Click **Set** next to **Lorex Logo** to choose the position of the logo overlay. Click-and-drag the logo to reposition it. Right-click when finished.
5. Click **OK** to save changes.
6. **(Optional)** Click **Copy** to copy overlay settings to other channels.

16.2.6 Creating Custom Channel Names

You can assign custom names to your cameras. For example, you can name your cameras based on their location (e.g. hallway or front door).

To create custom channel names:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **CHANNEL NAME**.
3. Click a channel to enter a custom name.
4. Click **Apply** to save changes.


16.3 Information Menu

View system information related to storage, network status, system warnings, and more.

16.3.1 Hard Drive Information

View information related to the hard drives installed in the system, including capacity, status, and type.


To access the HDD Info menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **INFO**. Click the **HDD** tab on the side panel.

16.3.2 Recording Information

View start and end times of recordings saved on the hard drive.


To access the Record Info menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **INFO**. Click the **RECORD INFO** tab on the side panel.

16.3.3 Version Information

View system information such as device ID, model number, IP address, and firmware version.

To access the Version Info menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **INFO**. Click the **VERSION** tab on the side panel.


16.3.4 Event Information

View a summary of active system alarms. Activated alarms are highlighted in white. Additional info such as channels that are currently detecting motion is shown.

The following alarms are shown in the Alarm Status menu:

- **No HDD:** No hard drive is detected.
- **HDD Error:** Hard drive error detected.
- **Disk Full:** Hard drive is full.
- **IP Conflict:** More than one device on the network is using the same IP address.
- **Net Disconnect:** System is not connected to the network.
- **MAC Conflict:** More than one device on the network is using the same MAC address.
- **Video Loss:** Shows disconnected channels.
- **Motion Detect:** Shows channels with active motion alarms.


To access the event information menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **EVENT**.

16.3.5 Online Users

View all users connected to the system using computers or mobile devices.


To access the online users menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **ONLINE USERS** tab on the side panel.

16.3.6 Network Load

View network traffic your system is sending and receiving.


To access the network load menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **Network Load** tab on the side panel.

16.3.7 Network Test

Test if your system can connect to other devices over the LAN or Internet. You can enter the IP address of a device and click **Test** to determine if your system can connect to it.


To access the network test menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **TEST** tab on the side panel.

16.3.8 BPS

Shows bitrates of connected cameras. The bitrate is the amount of data the camera is sending to the system.


To access the BPS menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **BPS**.

16.3.9 System Log

Search for system logs in a certain time range.

To access the log menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **LOG**.


16.4 Settings Menu

Configure general system settings, recording schedule, motion settings, and more.

16.4.1 Selecting DHCP or Static IP Address (TCP/IP)

Configure IP address settings.

To configure IP address settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **TCP/IP** tab on the side panel.
3. Check **DHCP** (recommended) to let the system automatically obtain an IP address from the router.

OR

Uncheck **DHCP** to assign a static IP address (advanced users only).

4. If you uncheck DHCP, configure the following:


- **IP Version:** Select **IPv4** or **IPv6**.
 - **IP Address:** Enter the IP address you would like to assign to the system. Make sure that no other device on your network is using the same IP address.
 - **Subnet Mask:** Enter the subnet mask for your network.
 - **Default Gateway:** Enter the gateway address for your network.
 - **Preferred DNS:** Enter the address of your primary DNS server.
 - **Alternate DNS:** Enter the address of your secondary DNS server.
5. Click **Apply** to save changes.

16.4.2 Configuring System Ports (Connection)

Configure ports used by the system for remote connectivity. If you are using DDNS connectivity, port forwarding is required for the HTTP Port (default: **80**) and TCP (Client) Port (default: **35000**).

NOTE
Port forwarding is not required unless you are using DDNS for remote access. Using mobile apps does not require port forwarding or DDNS setup.

To configure system ports:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **Port** tab on the side panel.
3. Configure the port numbers as needed.
4. Click **Apply** to save changes.

NOTE
Up to 3 devices may connect to the system at the same time.

16.4.3 Configuring IP Filter

Configure permissions for external IP addresses attempting to access the unit.

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **NETWORK**. Click the **IP FILTER** tab on the side panel.
3. Check **Enable**.
4. Select **Trusted Sites** to add IP addresses or ranges that are permitted to access the recorder, or select **Blocked Sites** to add IP addresses or ranges that are not permitted to access the recorder.
5. Click **Add** to enter an IP address or range.
6. Click **Apply** when finished.

16.4.4 Configuring Email Alerts

You can configure the system to send out email alerts for motion detection or other events.

NOTE
To send out motion detection alerts, you must enable the Send Email option for motion detection on each camera you would to receive alerts from. For details, see 12 Motion Detection .

To configure Email Alerts:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **NETWORK**. Click the **EMAIL** tab on the side panel.
3. Check **Enable** to enable email notifications.

If you want to use Lorex's email server (recommended):

1. Under **Mail Select**, select **Lorex Mail** to use the Lorex email server to send out alarm notifications. This is the recommended setting.
2. Configure the following:
 - **Email Schedule:** Configure time periods during which email alerts will be sent.
 - **Receiver:** Enter the email address that will receive alerts.
 - **Sender:** Enter the sender's email address.
 - **ALERT:** Enter the subject line for the email alert.
 - **Attachment:** Check to include an image attachment of the camera.

NOTE
You must enable the Snapshot option for motion detection on each camera you would to receive attachments. For details, see 12 Motion Detection .

- **Interval:** Enter the interval between alert emails.
 - **Health Enable:** Check to enable health check emails. Health check emails will be sent periodically to ensure that the system is functioning normally. Enter the interval in minutes for health check emails.
3. Click **Test** to send a test email.

4. Click **Apply** to save settings.

If you want to use your own email server (advanced):

1. Under **Mail Select**, select **Customize**.
2. Configure the following:
 - **SMTP Server:** Enter the SMTP server address.
 - **Port:** Enter the port used by the SMTP server.
 - **Anonymous:** Check if your server supports anonymous log ins. Otherwise, leave this unchecked.
 - **User:** Enter the SMTP user name.
 - **Password:** Enter the SMTP password.
 - **Receiver:** Enter the email address that will receive alerts.
 - **Sender:** Enter the sender's email address.
 - **ALERT:** Enter the subject line for the email alert.
 - **Attachment:** Check to include an image attachment of the camera.

NOTE
You must enable the Snapshot option for motion detection on each camera you would to receive attachments. For details, see 12 Motion Detection .

- **Encryption Type:** Select **SSL** or **TLS** if your server uses encryption. Select **None** if your server does not use encryption.
 - **Interval:** Enter the interval between alert emails.
 - **Health Enable:** Check to enable health check emails. Health check emails will be sent periodically to ensure that the system is functioning normally. Enter the interval in minutes for health check emails.
3. Click **Test** to send a test email.
 4. Click **Apply** to save settings.

16.4.5 FTP (Advanced)

Send recordings and/or snapshots to an FTP server.

To configure FTP settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **Settings**, then click **NETWORK**. Click the **FTP** tab on the side panel.
3. Check **Enable** to allow FTP connection, and select either **FTP** or **SFTP** depending on your configuration.
4. Configure the following:
 - **Host IP:** Enter the FTP server's address.
 - **Port:** Enter the FTP port.

- **Username:** Enter your FTP username.
- **Password:** Enter your FTP password.
- **Anonymous:** Enable if your FTP server supports anonymous login.
- **Remote Directory:** Enter the directory to save recordings and/or snapshots to.
- **File Length:** Enter the recording file length in minutes.
- **Image Upload Interval:** Enter the interval between snapshots in seconds.
- **Channel:** Select a channel to set FTP recording preferences for.
- **Weekday:** Select a day of the week to configure FTP recording settings for, or select **All** to apply to all days of the week.
- **Period:** Select up to 2 periods of time where the system will save recordings to the FTP. Check **Motion** or **Continuous** beside each period to determine which recording type will be uploaded to the FTP.


5. Click **Apply**.

16.4.6 Configuring Switch Settings (Advanced)

Configure the networking settings for the internal PoE switch.

CAUTION
It is recommended to leave this menu on the default settings. Changing the information in this menu may disrupt the connection to the cameras.

To configure switch settings:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **Switch Settings** tab on the side panel.
3. Configure the **IP Address**, **Subnet Mask**, and **Default Gateway** for the internal PoE switch.
4. Click **OK**. Click **Save** to save changes. The system will restart.

16.4.7 P2P Setting

The P2P Setting menu is used only to enable / disable remote access to the system using a P2P connection.

CAUTION
P2P connection is the primary method used for remote access to your security system using the Lorex Home app. If you disable P2P connectivity, you will only be able to access your system over the Internet using DDNS. See 22 DDNS Setup (Advanced) for details.

To change P2P setting:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **NETWORK**. Click the **P2P** tab on the side panel.

3. Check **Enable** to use P2P, or uncheck to disable.
4. Click **Apply**.

16.4.8 Configuring Video Loss Settings

Configure video loss settings and how the system reacts to a video loss event. **Video loss** means that video from one or more cameras was interrupted or disabled. It could be caused by a number of factors, such as a loose or damaged connection, loss of power to a camera, or a blocked camera lens.

To configure video loss settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **EVENT**, then click **MOTION** tab on the side panel, then click the **Video Loss** tab on the top panel.
3. Under **Camera**, select the channel you would like to configure.
4. Check **Enable** to enable video loss events for the selected channel.
5. Configure the following to customize settings for video loss events:
 - **Schedule:** Click **Set** to configure a schedule for video loss events. It is recommended to leave this on the default setting, so you can be alerted at any time one of your cameras loses video.
 - **Show Message:** Check to show a popup message on the monitor if one of your cameras loses video.
 - **Send Email:** Check to enable email alerts. You must configure email alerts before you will be able to receive them (see [16.4.4 Configuring Email Alerts](#)).
 - **Record Channel:** Click the checkbox to enable video recording when video loss occurs. You can then select the channels the system will record when video loss occurs on the currently selected channel.
 - **PTZ Activation:** Check to enable PTZ actions when video loss occurs (PTZ camera required; not included). Click **Set** to select which PTZ actions will be taken by each camera.
 - **Post_REC:** Enter the number of seconds the system will record after video loss occurs.
 - **Sequence:** Check to enable a custom sequence mode when motion is detected on the selected channel. Then click the channels you would like to display in the custom sequence mode.
 - **Snapshot:** Click the box to enable snapshot recording when video loss occurs. You can then select which channels will save snapshots when video loss occurs on the currently selected channel.
 - **Buzzer:** Check to enable the system buzzer when video loss occurs on the currently selected channel.
6. Click **Apply** to save changes.

16.4.9 Configuring Hard Drive Warnings

Hard drive warnings will notify you if an issue is detected with the hard drive.

To configure hard drive warnings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **EVENT**, then click **WARNING** tab on the side panel, then click the **HDD** tab on the top panel.

3. Under **Event Type**, select the hard drive event you would like to configure. Check **Enable** to activate the selected warning.
 - **No HDD:** No hard drive detected.
 - **Disk Error:** A hard drive error has been detected.
 - **Disk Full:** The hard drive is full or almost full. You can enter the percentage of disk space remaining that will trigger a warning under **Less Than** (e.g. when less than 10% of the hard drive is empty, trigger a warning). Disk Full warnings will not occur if overwrite is enabled.
 - **All:** Configure warnings for all hard drive events.
4. Configure the responses the system will take when the selected event occurs:
 - **Show Message:** Show a popup message on the monitor.
 - **Send Email:** Check to enable email alerts. You must configure email alerts before you will be able to receive them (see [16.4.4 Configuring Email Alerts](#)).
 - **Buzzer:** Check to activate the system buzzer.
5. Click **Apply** to save changes.

16.4.10 Configuring Network Warnings

Network warnings will notify you if there your system loses connection to the Internet or local network or if there is an issue on your network.

To configure network warnings:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **EVENT**, then click **WARNING** tab on the side panel, then click the **Network** tab on the top panel.
3. Under **Event Type**, select the event type you would like to configure. Check **Enable** to activate the selected warning.
 - **Net Disconnection:** The system has lost connection to the network.
 - **IP Conflict:** More than one device on your network has the same IP address.
 - **MAC Conflict:** More than one device on your network has the same MAC address.
 - **All:** Configure responses for all network events.
4. Configure the following for the selected event type:
 - **Show Message:** Check to show a popup message when the selected event occurs.
 - **Send Email:** Check to enable email alerts. You must configure email alerts before you will be able to receive them (see [16.4.4 Configuring Email Alerts](#)).
 - **Buzzer:** Check to activate the system buzzer.
5. Click **Apply** to save changes.

16.4.11 Configuring Pre-Recording

The system can pre-record video when motion detection events occur. This will ensure that the system records the entire event when motion is detected. By default, the system pre-records 4 seconds of video every time motion is detected.

NOTE
Ensure you have set your preferences for motion detection (see 12 Motion Detection for details).

To configure pre-recording:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **STORAGE**. Click the **SCHEDULE** tab on the side panel.
3. Under **Channel**, select the camera you would like to configure or select **All**.
4. Under **PreRecord**, select the duration for pre-recording.
5. Click **OK** to save settings.

16.4.12 Formatting the Hard Drive

Format the hard drive to erase all saved data. If you install a new hard drive, you must format the hard drive using the procedure below before you will be able to record.

To format the hard drive:

CAUTION
Formatting the hard drive erases all data on the hard drive. Formatting cannot be undone.


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **STORAGE**. Click the **HDD MANAGER** tab on the side panel.
3. Select the hard drive you would like to format.
4. Click **Format**, then click **Yes** to confirm.

16.4.13 Configuring Hard Drive Type

The system supports the following hard drive types:

- **Read/Write:** Normal recording hard drive.
- **Read-Only:** The system can playback data from this hard drive, but it will not record to it.

To set the hard drive type:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **STORAGE**. Click the **HDD MANAGER** tab on the side panel.
3. Select the hard drive type under the **Type** column next to the hard drive you would like to configure.
4. Click **Apply** to save changes. The system will restart to complete this operation.

16.4.14 Configuring Holidays

You can set certain days as holidays. Holidays have a special recording schedule.

To configure holidays:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **GENERAL** tab on the side panel, then click the **Holiday** tab on the top panel.
3. Click **Add Holidays**.
4. Configure the following:
 - **Holiday Name:** Enter a name for this holiday.
 - **Repeat Mode:** Select **Once** for the holiday to occur only this year or **Always** for the holiday to be repeated each year.
 - **Holiday Range:** Select **Date** to select a specific date, or select **Week** to select holidays based on which week they fall on.
5. Click **Add**. Now that you have added a holiday, an extra holiday setting is added to the recording schedule.

NOTE
You cannot delete holidays, but you can disable them by selecting Off under the Status drop-down, then click Apply .

16.4.15 Configuring General System Settings

Configure miscellaneous system settings.

To configure general settings:


1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **GENERAL** tab on the side panel, then click the **General** tab on the top panel.
3. Configure the following:
 - **Device No.:** Not supported.
 - **Language:** Set the system languages. Available options are English, French, and Spanish.
 - **Video Standard:** Select **NTSC** (North America) or **PAL** (Europe).
 - **HDD Full:** Select **Overwrite** for the system to overwrite the oldest recordings when the hard drive is full or select **Stop Record** for the system to stop recording when the hard drive is full.
 - **Pack Duration:** Select how the duration (in minutes) the system will store video files. For example, if this is set to 30 minutes, the system will create a new video file for each 30 minutes of continuous recording.
 - **Instant Playback:** Select the amount of time (in minutes) the system will go back when instant playback is activated in live view.

- **Auto Logout:** Select the idle time (in minutes) before the system will logout the current user.
 - **IPC Time Sync:** Select how often (in hours) the NVR will update the time on the IP cameras.
 - **Navigation Bar:** Check to enable the Navigation Bar that comes up when you left click in live view.
 - **Mouse Sensitivity:** Use the slider to adjust the mouse speed.
4. Click **Apply** to save changes.


16.4.16 *Setting the Monitor Resolution (Display)*

Configure the system's monitor resolution and other display settings.

To set the monitor resolution:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **DISPLAY** tab on the side panel, then click the **Display** tab on the top panel.
3. Under **Resolution**, select the correct resolution for your monitor.
4. Click **Apply** to save changes. Click **OK** again to restart the system using the new resolution.


To configure other display settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **DISPLAY** tab on the side panel, then click the **Display** tab on the top panel.
3. Configure the following:
 - **Transparency:** Select the menu transparency.
 - **Time Display:** Check to show the time on the monitor.
 - **Channel Display:** Check to show the channel names on the monitor.
 - **Image Enhance:** Check for the system to digitally improve the video quality on the live display. This setting does not affect recordings.
 - **Original Scale:** Set the system to show the true aspect ratio of the cameras on the live display. This may add black bars on the top and bottom of the image.
4. Click **Apply** to save changes.

16.4.17 *Configuring Sequence Mode*

Sequence mode cycles through connected channels to give you an overview of what is happening on all cameras. You can customize the order that channels appear in Sequence mode, as well as configure which viewing modes should be used.

To configure Sequence mode:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **DISPLAY** tab on the side panel, then click the **Sequence** tab on the top panel.

3. Choose how many channels will appear on screen when Sequence mode is triggered by motion detection (you must check **Sequence** when configuring motion detection — see [12 Motion Detection](#) for details).
4. Enter the amount of time in seconds that each channel or page will appear on screen during Sequence mode.
5. Select a viewing mode to configure. It is recommended to start with **View 1** and make your way to **View 9**. By default, all viewing modes are included in the Sequence mode cycle.
6. Configure the order of channels shown on screen for each viewing mode. Uncheck channels / channel groups that you want to remove from the Sequence mode cycle.
7. Click **Apply**.

16.4.18 Saving Your System Configuration to a USB Thumb Drive

The system allows you to save your current system configuration to a USB thumb drive (not included). This is useful if you want to backup your current settings.

NOTE
This function only saves settings created in system menus. It does not save or backup any video.

To save your system configuration to a USB thumb drive:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **Config Backup** tab on the side panel.
3. Under **Device Model**, select the USB device where you would like to save the configuration.
4. Click **EXPORT** to save your current system configuration.

To restore a saved system configuration:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **Config Backup** tab on the side panel.
3. Under **Device Model**, select the USB device where the system configuration is saved.
4. Click the folder with the configuration file you would like to restore. Configuration file folders are labeled “Config” and then the time and date the configuration was saved (e.g., *Config_20140425103727*).
5. Click **Import** to restore the system configuration.
6. Click **OK** to confirm. The system will restart to complete the operation.

16.4.19 Restore Default Settings

Restore the system to its default settings.

To restore default settings:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **SYSTEM**. Click the **DEFAULT** tab on the side panel.

3. Check the menus you would like to reset to default settings.
4. Click **OK**.


16.4.20 Upgrading Firmware Manually

The primary method for upgrading system firmware is automatically over the Internet. The system also supports firmware upgrades from a USB thumb drive (not included).

Prerequisite:

- Save the **.bin** firmware file for your unit onto a USB flash drive (not included), and connect the drive to one of the system's free USB ports.


To upgrade firmware manually:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **UPGRADE** tab on the side panel.
3. Click **Browse**.
4. Click on the **.bin** firmware file for your recorder.
5. Click **Start**.

16.4.21 Automatic Firmware Upgrades

Firmware upgrades provide enhanced functionality. The system will automatically check for firmware upgrades if it is connected to the Internet.


To configure automatic firmware upgrade:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SYSTEM**. Click the **UPGRADE** tab on the side panel.
3. Ensure **Automatically Check for Updates** is checked. If it was previously unchecked, click **OK** to save changes.
4. Click **Check for Updates** to check for a newer firmware version.
5. If a newer version is found, click **Upgrade Now** to upgrade the system.

16.5 Shutdown

Shut down, restart, or log out of the system.

To access the shutdown menu:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click , then click **SHUTDOWN**.
3. Select one of the following:
 - **Logout:** Log out the account that is currently active.
 - **Shutdown:** Power off the system.
 - **Restart:** Power off the system, then restart.

17 Connecting Remotely using the Lorex Home Mobile App

You can connect to your security system over the Internet using our free Lorex Home app for iOS and Android devices. Securely connect to your system from anywhere with no recurring fees for live viewing.



The Lorex Home app allows you to:

- View live video from cameras
- Play back recorded video from the hard drive
- Manually record video clips or take a snapshot of live video
- Activate deterrence features including warning lights and sirens*
- Set preferences for push notifications, informing you of motion detection and other system events

For full setup instructions and advanced support for the app, [click here](#) to open the Lorex Home instruction manual.

* On supporting devices.



18 Smart Home & Voice Assistance

The recorder is compatible with third-party smart home solutions, including Amazon Alexa® and Google Assistant®. You can use these services to take your security experience to the next level, with smart home options that make accessing your system even easier.

For compatibility information, as well as full instructions on setup and use, visit lorex.com/SmartHome.

19 Pan/Tilt/Zoom (PTZ) Cameras

Pan/Tilt/Zoom (PTZ) cameras are specialty cameras that move according to commands given by the recorder. You can move PTZ cameras manually using the recorder's on-screen display, or create preset locations and patterns for the camera to follow automatically.




19.1 Connecting PTZ Cameras to the Recorder

Lorex HD PTZ cameras connect to your recorder just like any other camera with no need to run special wiring — these cameras can accept PTZ commands directly through the Ethernet cable.

To connect Lorex PTZ cameras:




1. Connect the Ethernet cable to one of the video inputs on the recorder.
2. Connect the PTZ camera's power adapter to a power outlet.

 CAUTION	
○	When the PTZ camera powers on, it will perform an initial diagnostics check. The camera will move around during this process, so ensure the camera module is not resting against another object or surface.
○	Most PTZ cameras have a higher power requirement than fixed cameras. Check the power requirement in your PTZ camera's documentation to ensure you remain within the total PoE power output of the recorder (80W).

19.2 Basic PTZ Controls


Controlling PTZ cameras.

 NOTE	
Ensure you have completed initial setup of your PTZ camera in order to control the camera using the recorder. See 19.1 Connecting PTZ Cameras to the Recorder for more details.	

To access the PTZ controls:

- Open the Live View screen for your PTZ camera in single-channel view (fullscreen). Right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
- Right-click again to close PTZ controls.

To use the PTZ controls:

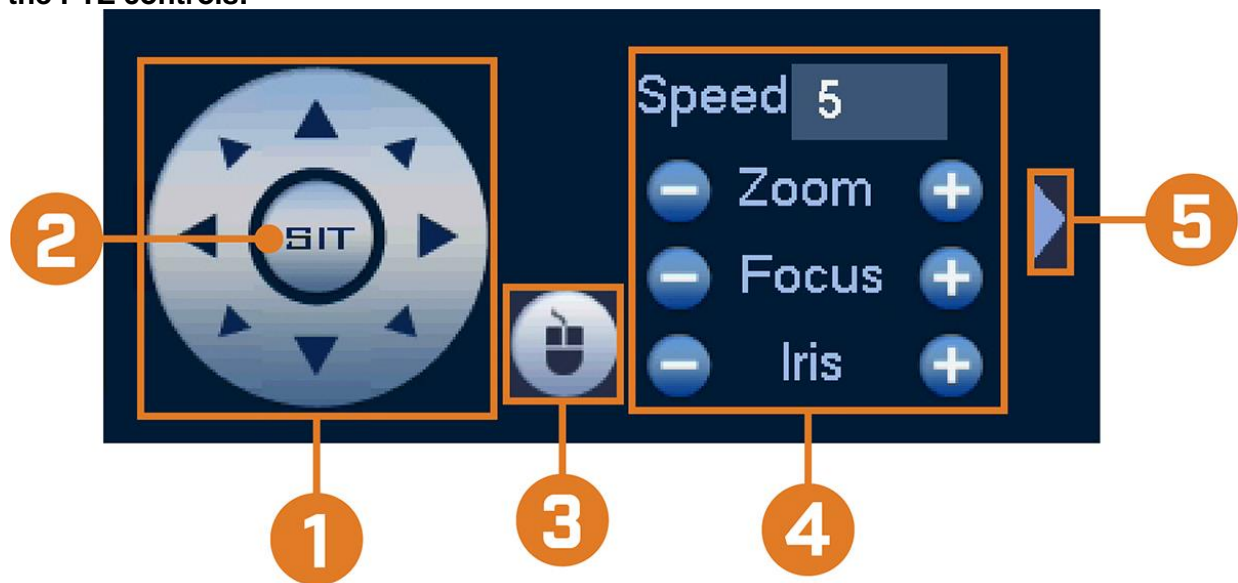

1. **Navigation Controls:** Click the directional arrows to move the PTZ camera manually.
2. **Zoom-to-Area:** Click, then click-and-drag to draw a box on the camera image. The PTZ camera will zoom in to the selected area.

3. **Mouse Tracking:** Click to enable/disable mouse tracking. When enabled, click-and-drag in the direction you would like the PTZ camera to move. The camera will follow the path of the mouse cursor.
4. **PTZ Settings:**
 - **Speed:** The speed of PTZ camera movement. A higher value means the camera will move faster.
 - **Zoom:** Optical zoom level. Click **+** to zoom in, and **–** to zoom out.
 - **Focus:** Manually control focus level. Click **+** to focus on objects further from the camera, or **–** to focus on objects closer to the camera.
 - **Iris:** Controls the amount of light coming through the lens. Click **+** to allow more light, or **–** for less.
5. **Advanced:** Expand to show advanced options. For a full overview, see [19.3 Advanced PTZ Controls](#).

19.3 Advanced PTZ Controls

Using advanced options for PTZ cameras, including presets, tours, patterns, etc.

NOTE
Ensure you have completed initial setup of your PTZ camera in order to control the camera using the recorder. See 19.1 Connecting PTZ Cameras to the Recorder for more details.

To access the advanced PTZ controls:

- Open the Live View screen for your PTZ camera in single-channel view (fullscreen). Right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
- Click the arrow on the far-right side of the PTZ control panel to access advanced options.
- Right-click again to close PTZ controls.

To use the PTZ controls:

1. **No.:** Enter the ID number for a preset, tour, or pattern you want to activate.
2. **Preset:** Move the camera to the preset number specified in the **No.** field. For instructions on setting up preset locations, see [19.4 Presets](#).
3. **AutoPan:** Set the camera to rotate 180° back and forth.
4. **Tour:** Perform the tour number specified in the **No.** field. For instructions on creating a tour, see [19.5 Tours](#).
5. **Flip:** Rotate the camera 180° from its current position.
6. **Pattern:** Perform the pattern number specified in the **No.** field. For instructions on creating a pattern, see [19.6 Patterns](#).
7. **Reset:** Move the camera to the home position.
8. **AutoScan:** Move the camera between a predetermined left and right point. For instructions on creating an autoscan, see [19.7 AutoScan](#).
9. **Configuration:** Click to open the configuration menu, where you can configure presets, tours, patterns and autoscans.
10. **OSD Menu:** Click to open the camera's OSD menu. This may not be supported on all camera models.

11. **Auxiliary Settings:** Not supported.

19.4 Presets

Presets will save a camera position for quick retrieval.

To add preset locations:

1. From the Live View display of your PTZ camera, right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
2. The PTZ controls open. Click . to open advanced PTZ controls, then click . .
3. Click the **Preset** tab.
4. Enter the number of the preset you want to create under **Preset**.
5. Move the camera to the desired position and click **Set**.

To go to a preset location:

- Under **No.**, select the number of the preset you want to go to, then click . .

19.5 Tours

Tours will cycle through a set of presets.

To add tours:

1. From the Live View display of your PTZ camera, right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
2. The PTZ controls open. Click . to open advanced PTZ controls, then click . .
3. Click the **Tour** tab.
4. Under **Patrol No.**, enter the number of the tour you want to create.
5. Under **Preset**, select a preset you want to add to the tour.
6. Click **Add Preset**.
7. Repeat steps 5 & 6 to add additional presets to the tour.

To run a tour:

- Under **No.**, select the number of the tour you want to go to, then click . .

19.6 Patterns

Patterns automatically move the camera according to manually-entered movements.

To add patterns:

1. From the Live View display of your PTZ camera, right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
2. The PTZ controls open. Click . to open advanced PTZ controls, then click . .
3. Click the **Pattern** tab.
4. Under **Pattern**, enter the number of the pattern you want to create.
5. Move the camera to the desired starting position, then click **Start**.
6. Using the on-screen controls, move the camera in any pattern you wish. When finished, click **End**.

To run a pattern:

- Under **No.**, select the number of the pattern you want to go to, then click . .

19.7 AutoScan

An autoscan automatically cycles between a left and right point.

To configure autoscan:

1. From the Live View display of your PTZ camera, right-click to open the Quick Menu, then click **Pan/Tilt/Zoom**.
2. The PTZ controls open. Click . to open advanced PTZ controls, then click . .
3. Click the **Border** tab.
4. Move the camera into the desired left position and click **Left**.
5. Move the camera into the desired right position and click **Right**.

To run autoscan:

- Click  .

20 Connecting Audio Devices


The system supports Lorex HD audio cameras, which transmit audio through the same network cable used for video connection and powering the camera. The system can also record one audio channel using the **AUDIO IN** port on the rear panel. You must have a self-powered microphone or an audio camera with an RCA-type audio connection to use this port.



NOTE

Use of an external microphone allows you to record audio on **Channel 1** of the system. It cannot be moved to a different channel.

The second RCA-type connector on the back panel is the **AUDIO OUT** port, which can be used to connect a self-powered speaker that will play audio from the system (requires audio-capable camera or self-power microphone).

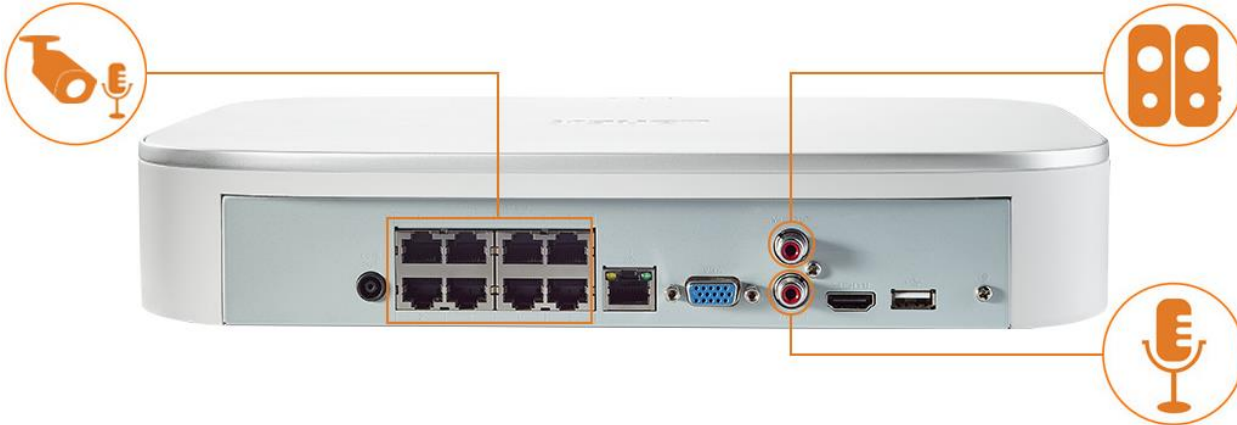


To enable audio recording:



CAUTION


Audio recording and / or use of listen-in audio without consent is illegal in certain jurisdictions. Lorex Corporation assumes no liability for use of its products that does not conform with local laws.

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click  , then click **RECORDING**. Click the **Recording** tab on the top panel.



3. Select the channel where the audio camera is connected.
4. Select the type of recording to enable audio for. If you wish to record audio at all times, ensure you configure both **Continuous** and **MD (Motion Detection)** recording.
5. Configure the following:

- **Audio/Video:** Ensure all boxes are checked.
- **Audio Encode:** Select an audio encoding.

 CAUTION
<p>In order to use your security system with voice commands, it is required to choose AAC encoding for the Substream. For more details on using voice commands with your security system, see 18 Smart Home & Voice Assistance.</p>

- **Sampling Rate:** Select an audio sampling rate.
6. Click **Apply**.

21 Replacing the Hard Drive

The system comes with a pre-installed 3.5" SATA hard drive. You can replace the hard drive with one up to a maximum size of 10TB.

21.1 Removing the Hard Drive



CAUTION

Make sure that the system is OFF and the power adapter is disconnected before removing/installing a hard drive.

To remove the hard drive:

1. Power off the system, and unplug all cabling from the system.
2. Turn the recorder over. Remove the bottom panel screws (6×).



3. Turn the recorder over carefully, then remove the top panel.



CAUTION

The wiring to the front panel button and USB port runs along the top panel of the recorder. When separating the top panel, rest it carefully beside the bottom panel as shown below.

4. Remove the power and SATA cables from the hard drive.

5. Carefully pick up the hard drive to lift the bottom panel, being mindful of the sharp edges of the bottom panel. Remove the hard drive screws (4x) from the bottom panel. Hold onto the hard drive so it remains in place when all screws have been removed.

6. If you are not immediately going to install a new hard drive, replace the top panel and the 6 bottom panel screws.

21.2 Installing a New Hard Drive

CAUTION

Make sure that the system is OFF and the power adapter is disconnected before removing/installing a hard drive.

To install a new hard drive:

1. Insert the 2 hard drive screws closest to the SATA and power ports on the hard drive and tighten them half way.

2. Power off the system, and unplug all cabling from the system.


3. Turn the recorder over. Remove the bottom panel screws (6x).

4. Turn the recorder over carefully, then remove the top panel.

CAUTION

The wiring to the front panel button and USB port runs along the top panel of the recorder. When separating the top panel, rest it carefully beside the bottom panel as shown below.

5. Line the 2 half-inserted hard drive screws with the 2 holes shown below.



6. Carefully pick up the bottom panel with the hard drive, being mindful of the sharp edges of the bottom panel. Slide the 2 pre-inserted screws into the locked position, then tighten the screws. Insert and tighten the 2 remaining hard drive screws.

•

7. Connect the power and SATA cables to the hard drive.

•

8. Replace the top panel and the 6 bottom panel screws.



22 DDNS Setup (Advanced)

Setting up DDNS connectivity allows you to view your recorder from any computer or compatible mobile device with Internet access.



NOTE

The primary connectivity option for the recorder uses the Lorex Home app to connect to your system over the Internet without the need for port forwarding or DDNS registration.


- For instructions on using the Lorex Home app for mobile devices, see [17 Connecting Remotely using the Lorex Home Mobile App](#).

22.1 STEP 1: Port Forwarding

If you are using DDNS, you **must** port forward the HTTP and Client Ports (default: **80** and **35000**) on your router to your recorder's IP address before you can remotely connect to your system:

- Manually port forward the required ports on your router to your recorder's IP address by following your router manufacturer's instructions. For more information on port forwarding, see the reference guides on lorex.com.


22.2 STEP 2: Create a Lorex Account

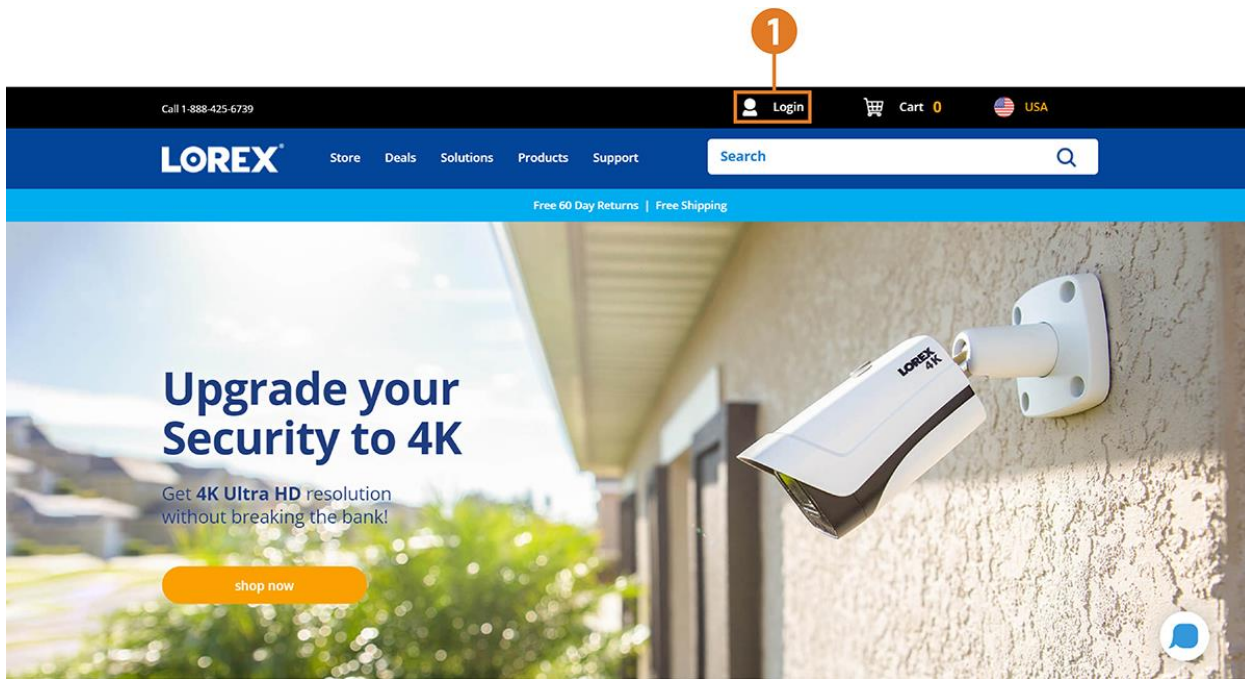

1. Visit lorex.com and click **Login** at the top of the page.

A screenshot of the Lorex 'Login' page. The page has a heading 'Login' and a subheading 'Please select one of the options listed below, as a guest user you will have an opportunity to create an account at the end if one does not exist for you.' There are two radio buttons: 'I Have a LOREX Account' and 'Create an Account'. The 'Create an Account' button is highlighted with a red circle and the number 2. To the right of the radio buttons is a form with five input fields: 'Tom', 'Smith', 'tomsmith@email.com', a password field with asterisks, and another password field with asterisks. The form is highlighted with a red circle and the number 3. Below the form is a checkbox labeled 'Email me about product updates, sales, special pricing and more. My email address will only be used as described in the privacy policy.' At the bottom of the form is a large orange button labeled 'Create an Account', which is highlighted with a red circle and the number 4.

2. Select **Create an Account**.

	NOTE
	If you have already set up an account, select I Have a LOREX Account and log in. Proceed directly to .

3. Enter basic information for account setup.
4. Click **Create an Account**.

22.3 STEP 3: Activate Your Warranty

Activate the manufacturer's warranty on your recorder.

To activate your product warranty:

My Warranties

Activating your product warranty is the most effective way to keep track of your product models and purchase dates, and provides you with access to Technical Support and Customer Service assistance. Please click [here](#) to read more about your warranty.

You can activate a new warranty registration by clicking on the "Activate Warranty" button and completing the form, and you can review all previously activated warranties below.

Tip: It is a good idea to keep a copy of your receipt in an easy to find location. If you require warranty repair or assistance, our Customer Service team will need a copy of the receipt as proof of purchase.

1 **WARRANTIES**

2 **Activate Warranty**

3 **Activate a New Warranty**

D841A81B DK0000000000

04/02/2019 Lorextechnology.com | Website

Upload Bill of Sale (max file size 1MB)

Choose File No file chosen

4 **Save Warranty**

1. From your Lorex account, click the **WARRANTIES** tab.
2. Click **Activate Warranty**.
3. Enter your product information (attaching bill of sale optional).
4. Click **Save Warranty**.

Once submitted, your warranty information will be summarized under **My Warranties**.

22.4 STEP 4: Sign Up for a DDNS Account

Activate the manufacturer's warranty on your recorder.

To sign up for a DDNS account:

1. From your Lorex account, click the **DDNS** tab.
2. Click **Set up a New DDNS**.
3. Select your recorder warranty from the dropdown next to **Warranty**. Enter the rest of your product information.

NOTE

- The **Device Name** can be any name of your choice (for example, "Store Security System").
- You can find your recorder's **MAC Address** in the system information window on the recorder. From the Live View display, right-click and click **Info**, or click on the Navigation Bar.

4. Click **Add Device**.

Once submitted, your DDNS account information will be summarized under **My DDNS Devices**. Make a note of your DDNS **URL**, **Username** and **Password**, as they will be needed to complete DDNS setup.

22.5 STEP 5: Enable DDNS on the Recorder

Enter your DDNS information into the menu of your recorder. You can find the information referenced below on your My Lorex account, or on the confirmation email sent to you after registering for DDNS service.

To configure DDNS in the recorder:

1. From the Live View display, right-click to open the Quick Menu, then click **Main Menu**.
2. Click **NETWORK**, then click **DDNS**. Click the **DDNS** tab on the side panel.
3. Check to enable DDNS connectivity.
4. Configure the following:
 - **DDNS Type:** Select **Lorex DDNS**.
 - **Domain Name:** Enter the first part of the DDNS domain that you requested during setup.
 - **User ID:** Enter the username provided in the DDNS confirmation email.
 - **Password:** Enter the password provided in the DDNS confirmation email.
5. Click **Apply**.

You will now be able to access your system remotely using DDNS. Enter the full domain name into a web browser (e.g., <http://www.tomsmithsecurity.lorexddns.net>) and login using the provided credentials.

NOTE
If your system uses an HTTP port other than 80, you will need to add a colon to the end of your DDNS domain name and enter the port number (e.g., http://www.tomsmithsecurity.lorexddns.net :81)

23 Troubleshooting

When a malfunction occurs, it may not be serious and can be corrected easily. The following describes the most common problems and solutions. Please refer to the following before calling Lorex technical support:

Error	Possible Causes	Solutions
<ul style="list-style-type: none">System is not receiving power, or is not powering up.	<ul style="list-style-type: none">Cable from power adapter is loose or is unplugged.	<ul style="list-style-type: none">Confirm that all cables are connected correctly.Confirm that the power adapter is securely connected to the back of the unit.
	<ul style="list-style-type: none">Cables are connected, but system is not receiving sufficient power.	<ul style="list-style-type: none">Confirm that the system is powered on (LED indicators on the front should be ON).If the unit is connected through a power bar or surge protector, try bypassing the bar and connecting the power directly to the wall outlet.Confirm that there is power at the outlet:<ul style="list-style-type: none">Connect the power cable to another outlet.Test the outlet with another device (such as a lamp or phone charger).
<ul style="list-style-type: none">Hard drive is not detected by the system.	<ul style="list-style-type: none">Hard drive cables are loose or not properly connected.	<ul style="list-style-type: none">Remove the housing and check that hard drive cables are firmly connected.
	<ul style="list-style-type: none">There is no hard drive in the system.	<ul style="list-style-type: none">Open the housing and install compatible hard drive. Make sure to format the drive after installing. For details, see 21 Replacing the Hard Drive.
<ul style="list-style-type: none">Hard drive is full (0%) and the unit is no longer recording.	<ul style="list-style-type: none">Overwrite is not enabled.	<ul style="list-style-type: none">See 9.5 Configuring Hard Drive Overwrite for full instructions on enabling hard drive overwrite.
<ul style="list-style-type: none">There is no picture on monitor/TV after	<ul style="list-style-type: none">Monitor/TV not detected by system.	<ul style="list-style-type: none">Power off the monitor/TV and system. Power on the monitor/TV, and then power on the system.

Error	Possible Causes	Solutions
connecting it to the system.	<ul style="list-style-type: none"> Input channel for system not selected on monitor/TV. 	<ul style="list-style-type: none"> On the monitor/TV, select the input channel the system is connected to.
	<ul style="list-style-type: none"> Video cable is loose or has become disconnected. 	<ul style="list-style-type: none"> Check the video cable connection to the system and monitor/TV.
	Camera is not compatible with the recorder.	Visit lorex.com/compatibility and navigate to N841 Series for a list of all compatible cameras.
<ul style="list-style-type: none"> Mouse not detected by system. 	<ul style="list-style-type: none"> Mouse cable is not firmly connected to the system. <p>Mouse is not connected to the system.</p>	<ul style="list-style-type: none"> Firmly connect the mouse cable to one of the USB ports.
	<ul style="list-style-type: none"> System needs to be reset 	<ul style="list-style-type: none"> Power off the system (disconnect power cable). Firmly connect a USB mouse to one of the USB ports. Reconnect the power cable to the DC 12V port on the rear panel.
<ul style="list-style-type: none"> There is no picture on selected channels / camera picture is not being displayed. 	<ul style="list-style-type: none"> Camera cables are loose or have become disconnected. 	<ul style="list-style-type: none"> Check the camera video cable and connections. Disconnect and reconnect the cable at the system and at the camera. Try moving the camera to another channel or use another cable.
<ul style="list-style-type: none"> The system beeps at startup. 		<ul style="list-style-type: none"> The beep at startup is normal.
<ul style="list-style-type: none"> The system beeps during motion detection. 	<ul style="list-style-type: none"> Motion detection is enabled and the alarm buzzer is activated. 	<ul style="list-style-type: none"> See 12 Motion Detection for instructions on configuring motion detection options. Uncheck the Buzzer option in the motion detection configuration screen.
<ul style="list-style-type: none"> I am not receiving email notifications. 	<ul style="list-style-type: none"> Email notification is disabled. 	<ul style="list-style-type: none"> Ensure you have configured email notification. For details, see 16.4.4 Configuring Email Alerts.

Error	Possible Causes	Solutions
	<ul style="list-style-type: none">• Send Email setting not enabled in Event menu.	<ul style="list-style-type: none">• Make sure that Send Email is checked for any events you want to be notified of.



24 Technical Specifications

24.1 General

Video Transmission Technology	IP
Channels	8 Channels

24.2 Inputs/Outputs

Video Input	8 ch: 8 × PoE
Video Outputs 1	1 × VGA/1 × HDMI
Audio Input	1 ch: RCA type
Audio Output	1 ch: RCA type

24.3 Display

Display Output Resolution	Up to 4K UHD, Auto Detect
Live Display	8 ch: 1,4,8
Live Display Speed (Max)	8 ch: 240fps NTSC/200 fps PAL
OSD	On/Off
System Navigation	USB Mouse

24.4 Recording

Recording Resolution	4K (8MP)/5MP/4MP/3MP/1080p/720p
Recording Frame Rate	8ch: 240fps up to 4K
Recording Scheduling	Per Channel: Continuous/Motion/Smart Motion (Person & Vehicle)/Area/Alarm/ Day/ Hour
Back-up File Format	DAV/ASF/AVI/MP4

Video Compression	H.265/H.264
--------------------------	-------------

24.5 Playback

Simultaneous Playback	Up to 4 channels, synchronized
Playback Speed	Variable Max 16×
Search	By Time/Date, All Motion Events or Smart Motion (Person & Vehicle), Area Search

24.6 Storage

Hard Drive Bays	1 Bay
Hard Drive Capacity	Up to 10TB (SATA)
Backup Media	USB Flash Drive & USB HDD

24.7 Special Features

Smart Motion Detection	Person and Vehicle Smart Motion Detection 2
Smart Search	Yes
Third Party Integrations	Google Assistant™, Amazon Alexa™ 3

24.8 Smart Home

Amazon Alexa	Yes
Google Assistant	Yes
Streaming Options	Chromecast, Apple TV, Amazon Echo Show, Google Home Hub

24.9 Connectivity

Mobile Viewing 4	Android, iOS
Compatible App	Lorex Home™
PC/MAC Remote Viewing	Yes/Lorex Cloud
Email Notification	Text and Snapshot
Network Interface	10/100 Base-TX, RJ45
Network Bit Rate	80Mbps total, 48~8192kbps per camera
DDNS	Yes (Optional)
USB Interface	USB 2.0 × 2

24.10 Additional Specifications

FW Upgrade	USB/Network
Watchdog Function	Yes
Power Consumption	Approx. 8.3W (without HDD)
Supply Voltage	100VAC-240VAC, 50/60Hz, DC48V/2A
Total PoE Power Output	PoE: Max 25.5W for single port, 80W total
Unit Dimensions (W × D × H)	12.9 × 9.6 × 2.1" (328 × 245 × 53 mm)
Unit Weight	2.75lbs (1.26kg) (without HDD)
Operating Temperature	14° ~ 131°F / -10° ~ 55°C
Humidity	10 ~ 90% RH

Disclaimers:

1. HDMI output supports 4K HD for high definition multi-channel live or recorded video viewing. Image quality and resolution is dependent on the type of camera connected to the NVR, as well as TV/monitor resolution.

2. Compatible with certain Lorex IP cameras only. For a list of compatible cameras please visit lorex.com/compatibility
3. Controlling certain features in your security system requires a compatible smart device. Availability and performance of certain features and services are smart device dependent and may not be available in all areas or networks. For compatibility, features, and instructions visit lorex.com/SmartHome
4. Both firmware and software must be updated to latest version to ensure remote connectivity.



25 Notices

This product has been certified and found to comply with the limits regulated by FCC, EMC, and LVD. Therefore, it is designated to provide reasonable protection against interference and will not cause interference with other appliance usage. However, it is imperative that the user follows the guidelines in this manual to avoid improper usage, which may result in damage to the product, electrical shock and fire hazard injury.

25.1 FCC/IC

This equipment has been tested and found to comply with the limits for a digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential or commercial installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

25.2 CE

This product and the supplied accessories are marked with “CE” and comply with the applicable harmonized European standards listed under Low Voltage Directive 2006/95/EC and the EMC Directive 2004/108/EC.

25.3 Modification

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.

Toute modification non approuvée explicitement par le fournisseur de licence de l'appareil peut entraîner l'annulation du droit de l'utilisateur à utiliser l'appareil.

25.4 RoHS

This product is fully compliant with the European Union Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment ("RoHS") Directive (2002/95/EC). The RoHS directive prohibits the sale of electronic equipment containing certain hazardous substances such as lead, cadmium, mercury, and hexavalent chromium, PBB, and PBDE in the European Union.

25.5 ICES-003

This device meets the CAN ICES-3 (A) / NMB-3 (A) standards requirements.